Designer Line F Series 20ft. Modular Exhibit Design 11

TensionLite Design 11 and counters are a perfect solution for the serious exhibitor. Exhibits feature heavy-duty aluminum extrusion frames and push-fit fabric graphics. Count on making an unforgettable impact with Designer Line F Series 20ft. Modular Exhibit Design 11 counters, and accessories.



* foreground counters not included

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- Silver aluminum extrusion frame
- Illuminated SEG push-fit graphic panel with interior top and bottom LED lighting
- Single-sided SEG dye-sublimated push-fit fabric graphics
- Easy step-by-step instructions

- Design includes frame, two side/top white accents, four fabric graphic panels, one illuminated graphic panel, two pillowcase fabric graphics, two counters, two medium monitor mounts, one SCRATE and two woodcrates
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware

Assembled unit: 222.75"w x 94.75"h x 19.63"d 5658mm(w) x 2407(h) x 499mm(d)

Backwall Counters: 21.75"w x 38"h x 17.75"d approx. 553mm(w) x 965mm(h) x 451mm(d) *Support 50 lbs / 22.68 kgs each

Shipping

Shipping dimensions - ships in 3 cases: 1 SCRATE case: 59"l x 57"h x 33"d 1499mm(l) x 1448mm(h) x 838mm(d)

2 WOODCRATES: 48"l x 30"h x 27"d 1219.2mm(l) x 762mm(h) x 686mm(d)

Approximate shipping weight (entire kit): 835 lbs / 379 kgs

Graphic

Refer to related graphic templates for more information.

additional information:

Graphic material: Dye-sublimated fabric

Laminate cabinet with locking storage door and custom side/top laminate accent panel

Medium monitor bracket holds 26-40" LCD, maximum weight: 50lbs / 22.68 kgs

*LCD monitors not included

*Foreground counters not included

Laminate counter color options:



grey



black




white








maple


Code	#	Description
GRAPHIC B1	1	70 7/8" (H) X 23 5/8" (W) SINGLE SIDED DYESUB GRAPHIC W/ FCE-2 (SEG) ON PERIMETER
GRAPHIC B2	1	70 7/8" (H) X 23 5/8" (W) SINGLE SIDED DYESUB GRAPHIC W/ FCE-2 (SEG) ON PERIMETER
SW-FOOT	6	SMARTWALL SUPPORT FOOT
R10	12	1200MM (47.24") PHFC4 EXTRUSION WITH MITRE CUT 1 END FOR CB9 ONE END-IB2 HOLES ONE END
CB9	12	CB9 CORNER BRACKET
IB2	13	INLINE BRACKET CONNECTOR
R41	4	900MM (35.43") PHFC4 EXTRUSION WITH MITRE CUT 1 END FOR CB9 ONE END-IB2 HOLES ONE END
R26	4	900MM (35.43") PHFC4 EXTRUSION WITH MITRE CUT BOTH ENDS
GRAPHIC A1	1	82 11/16" (H) X 35 7/16" (W) SINGLE SIDED DYESUB GRAPHIC W/ FCE-2 (SEG) ON PERIMETER
GRAPHIC C	1	94 1/2" (H) X 94 1/2" (W) BACKLIT DYESUB GRAPHIC W/ FCE-2 (SEG) ON PERIMETER
MM-MB	2	MEDIUM MONITOR BRACKET FOR MONITORS 15"-40"
R42	4	810MM (31.89") 50MM PM2S 4 WAY SQUARE EXTRUSION WITH LOCKS 2 ENDS
R55	4	510MM (20.08") PHFC2 EXTRUSION WITH LOCKS 2 ENDS
GRAPHIC A2	1	82 11/16" (H) X 35 7/16" (W) SINGLE SIDED DYESUB GRAPHIC W/ FCE-2 (SEG) ON PERIMETER
UNPRINTED C	1	94 1/2" (H) X 94 1/2"" (W) WHITE FABRIC W/ FCE-2 (SEG) ON PERIMETER
CB9-S	8	50MM SQUARE PHCF2 CORNER BRACKET
R43	6	855MM (33.66") PHFC2 EXTRUSION WITH LOCKS 2 ENDS WITH SIDE CAM LOCKS
LN-100	6	JOINING BAR
LED-WHT-DB-300	28	300MM (11.81") LENGTH LED LIGHTS FOR DIRECTIONAL BACKLIGHT
R7	2	1155MM (45.47") PH1 EXTRUSION WITH IB2 HOLE ONE SIDE-WITH LOCK 1 END
CUST FS	2	APPROX. 62" W X 90" H X 18" D CUSTOM L-SHAPED FABRIC STRUCTURE - FRAME ONLY

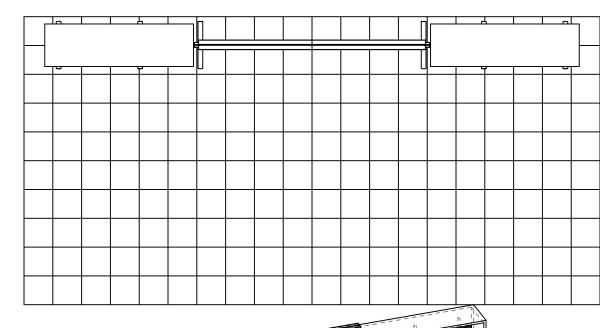


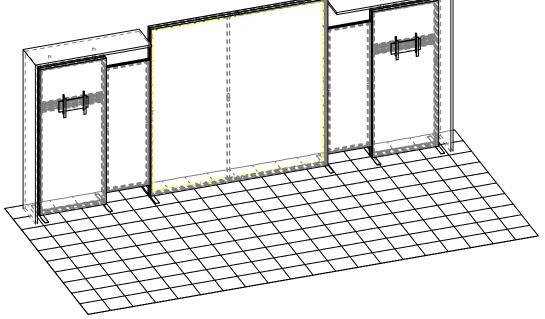

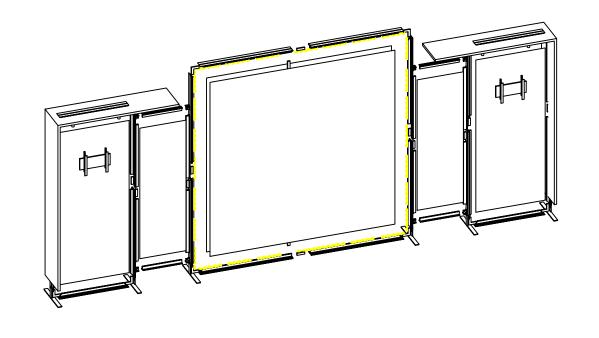

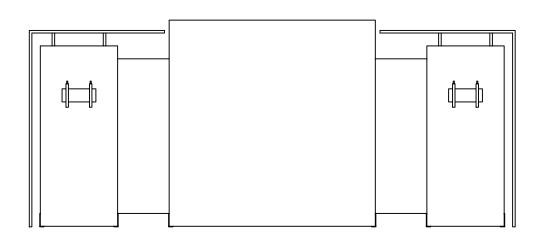

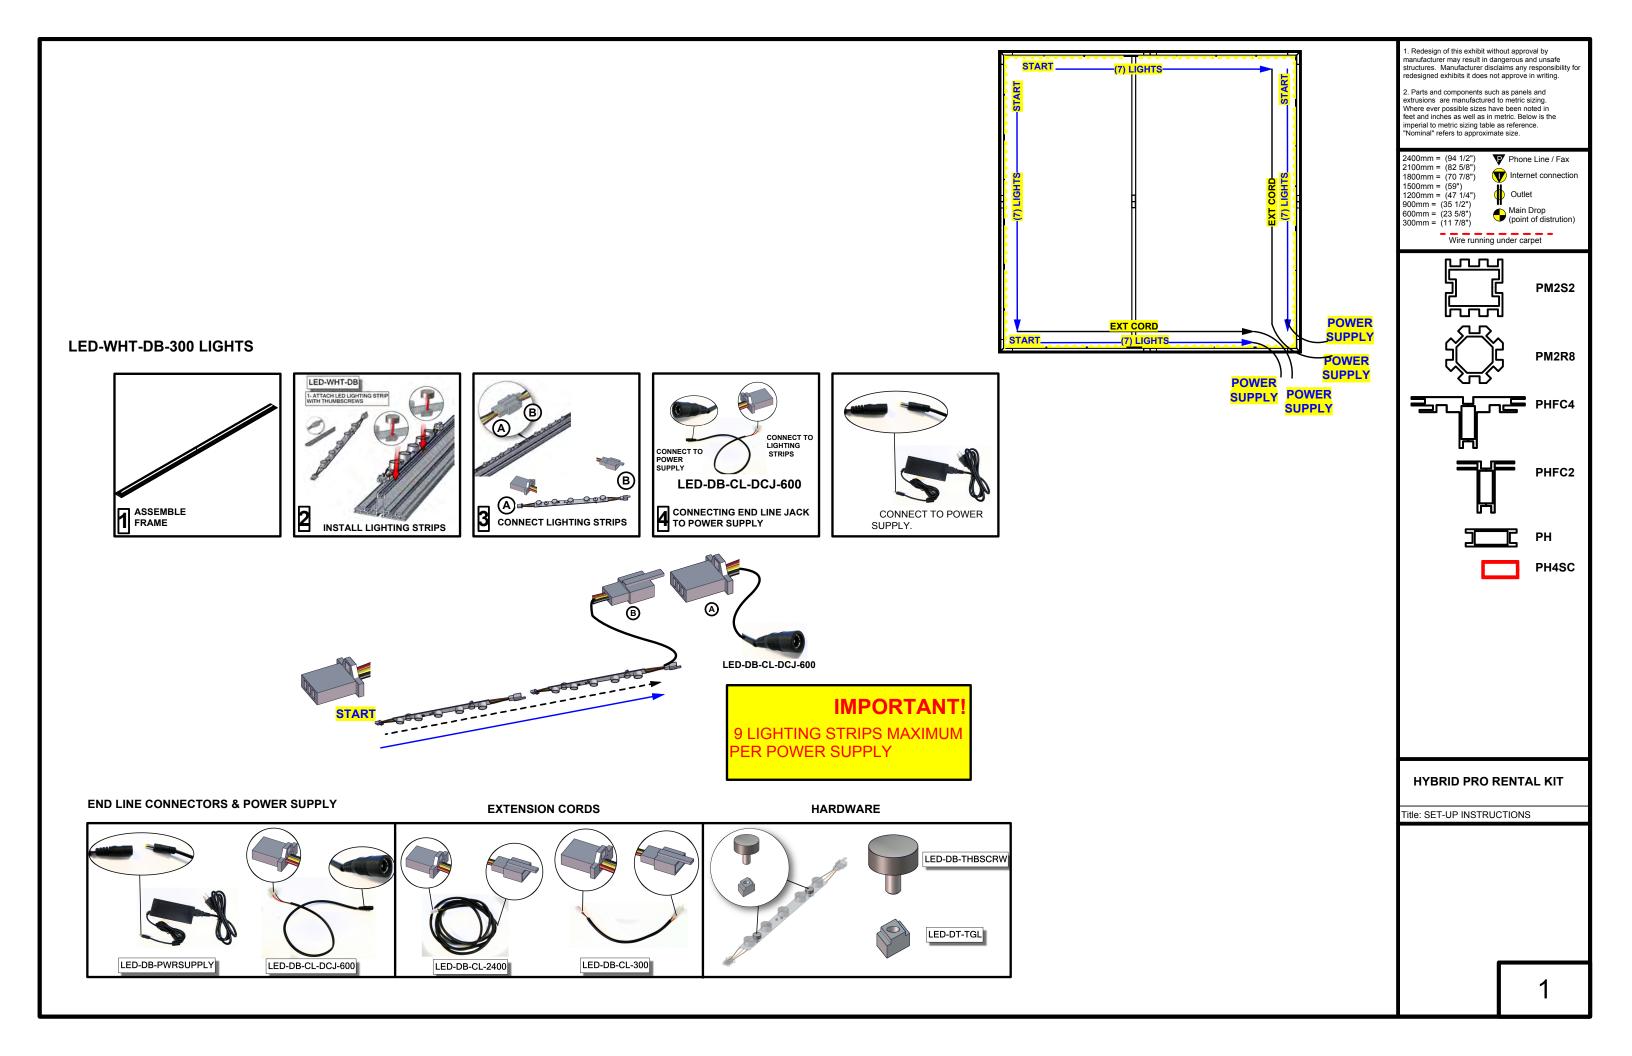

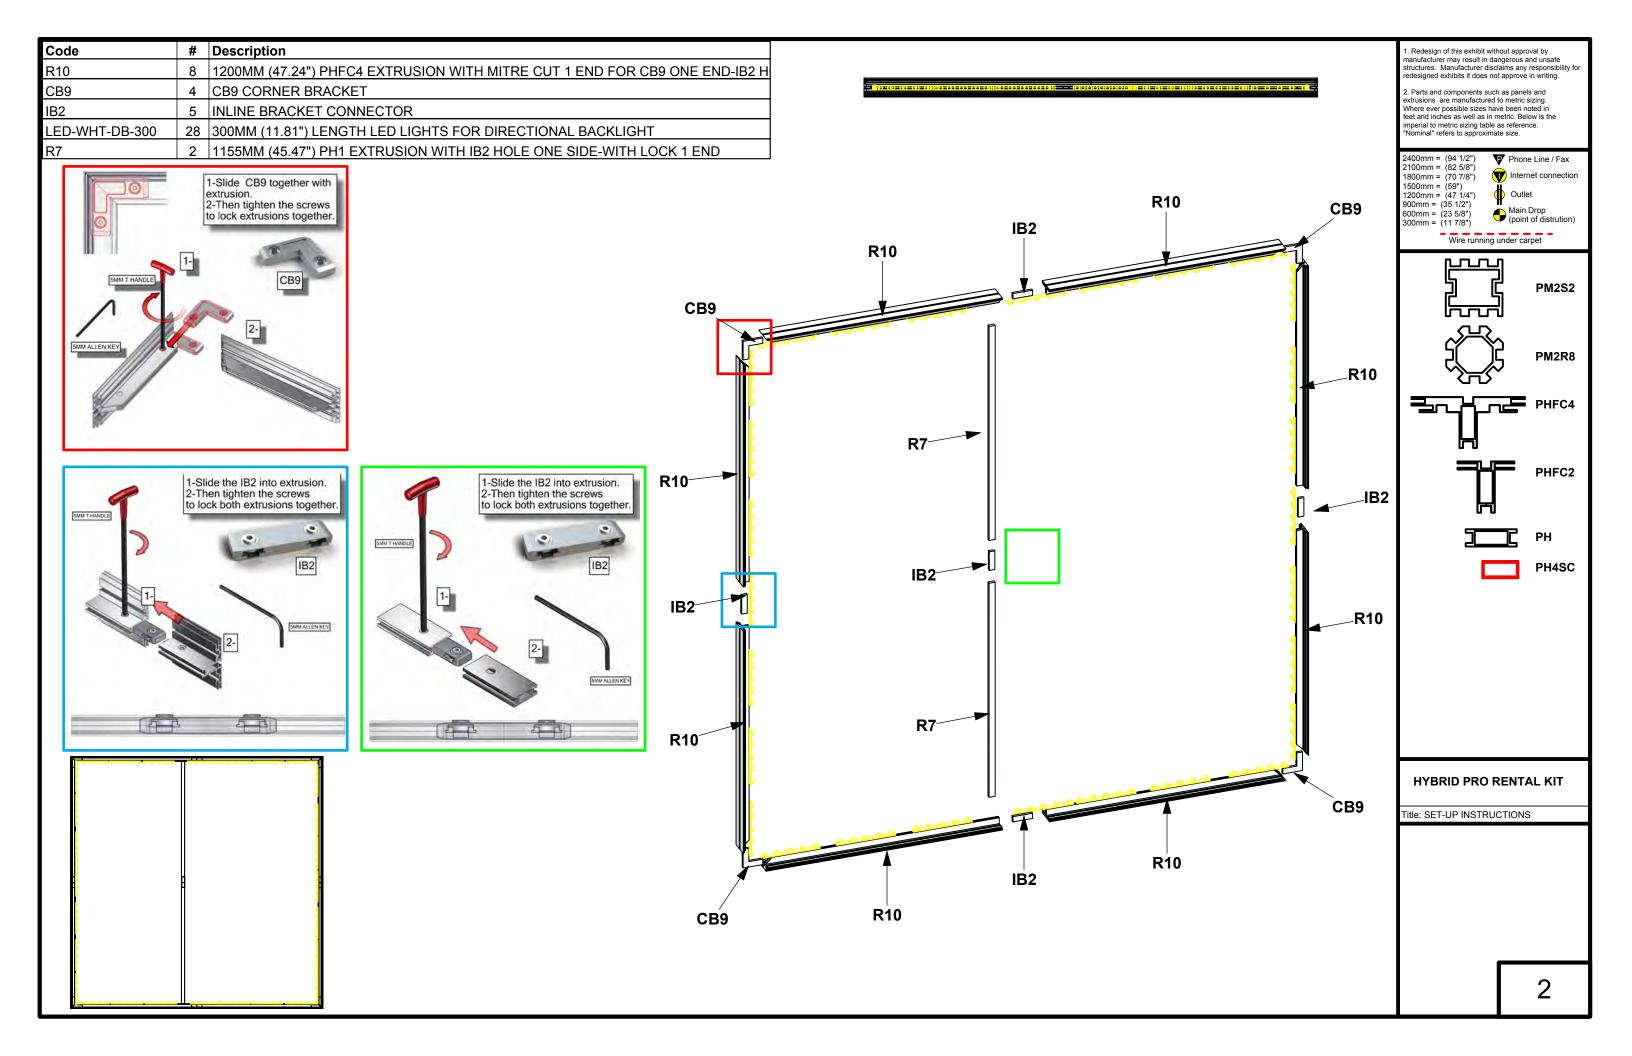

Code	#	Description
SW-FOOT	2	SMARTWALL SUPPORT FOOT
GRAPHIC C	1	94 1/2" (H) X 94 1/2" (W) BACKLIT DYESUB GRAPHIC W/ FCE-2 (SEG) ON PERIM
UNPRINTED C	1	94 1/2" (H) X 94 1/2"" (W) WHITE FABRIC W/ FCE-2 (SEG) ON PERIMETER
LN-100	2	JOINING BAR



 Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

 Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.



Phone Line / Fax Outlet

Main Drop (point of distrution) 600mm = (23 5/8") 300mm = (11 7/8")

Wire running under carpet

PM2S2


PM2R8


PHFC2


PH4SC


3


FCE-2 TO PHFC4








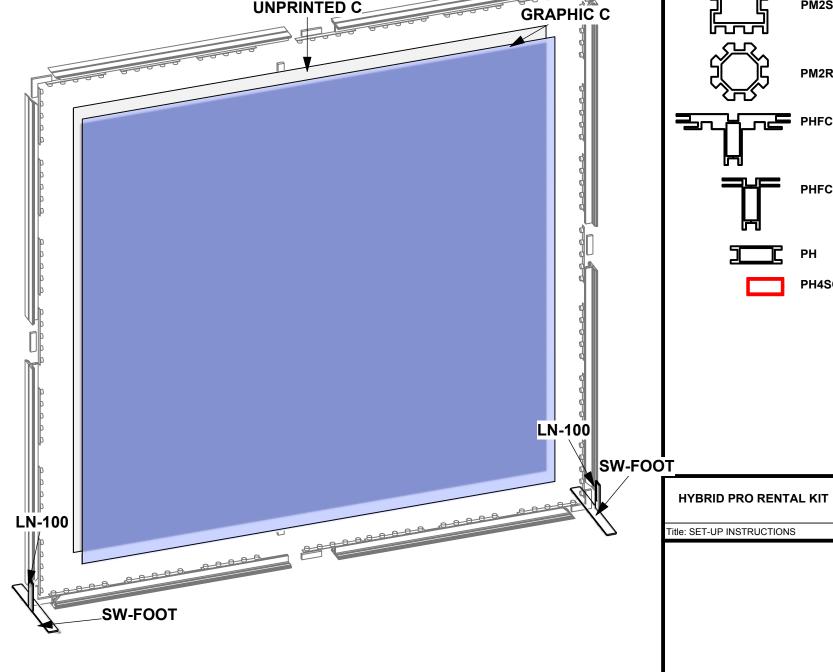

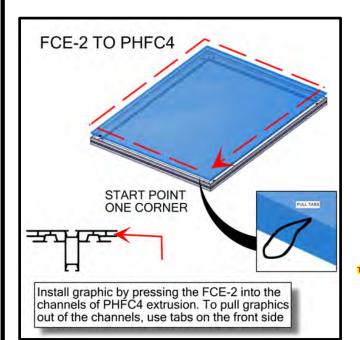


Code # Description		Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe
R55 4 510MM (20.08") PHFC2 EXTRUSION WITH LOCKS 2 ENDS		structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.
IB2 4 INLINE BRACKET CONNECTOR		Parts and components such as panels and extrusions are manufactured to metric sizing.
CB9-S 8 50MM SQUARE PHCF2 CORNER BRACKET		Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference.
R43 6 855MM (33.66") PHFC2 EXTRUSION WITH LOCKS 2 ENDS V		"Nominal" refers to approximate size.
I-Slide the IB2 into extrusion. 2-Then tighten the screws to lock both extrusions together. 1-Slide the IB2 into extrusion. 1-Then tighten the screws to lock both extrusions together.	LOCK FRAME TO LIGHTBOX CB9-S CB9-S CB9-S R43 R43 R43 R43 R43 R43 R43 R4	2400mm = (94 1/2") 2100mm = (82 5/8") 1800mm = (70 7/8") 1500mm = (59") 1200mm = (47 1/4") 900mm = (35 1/2") 600mm = (23 5/8") 300mm = (11 7/8") Wire running under carpet PM2S2 PM2R8 PHFC4 PHFC4 PHFC2 PH PH4SC
	R43 CB9-S CB9-S	
WARNINGI Locks should ONLY be turned a quarter turn, so as not to STRIP the locks by		
SIDE	CB9-S R55	HYBRID PRO RENTAL KIT
LOCKS		Title: SET-UP INSTRUCTIONS
5MM T-HANDLE		
LOCK EXTRUSION BY USING 5MM HEX KEY		4

Code	#	# Description WARNING!		Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe
SW-FOOT	4	Locks should ONLY be turned a quarter turn as not to STRIP the loc over torqueing them	n, so	manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.
R10	4			Parts and components such as panels and extrusions are manufactured to metric sizing.
R41		900MM (35.43") PHFC4 EXTRUSION WITH MITRE CUT 1 END FOR CB9 ONE END-IB2 HOLES	l l	Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the
CB9		B CB9 CORNER BRACKET		mperial to metric sizing table as reference. "Nominal" refers to approximate size.
R26	i i	- Cooking (Co. 10) Find a Lext Cooking William Co. 10) Find a Cooking Co.	2	2400mm = (94 1/2") Phone Line / Fax
IB2		4 INLINE BRACKET CONNECTOR		2100mm = (82 5/8") 1800mm = (70 7/8") Internet connection
R42		To Tolling (Clieb) Committing Clieb (Clieb)		1500mm = (59") 1200mm = (47 1/4") 000mm = (35 1/2") Outlet
SMM T HANDLE	[1	In the state of th	RUSION BY USING 5MM ALLEN KEY R26 R42 R41 R10 CB9 SW-FOOT R26	Main Drop (point of distrution) Wire running under carpet PM2S2 PM2R8 PHFC4 PHFC2 PH PH4SC HYBRID PRO RENTAL KIT Fitle: SET-UP INSTRUCTIONS
				5

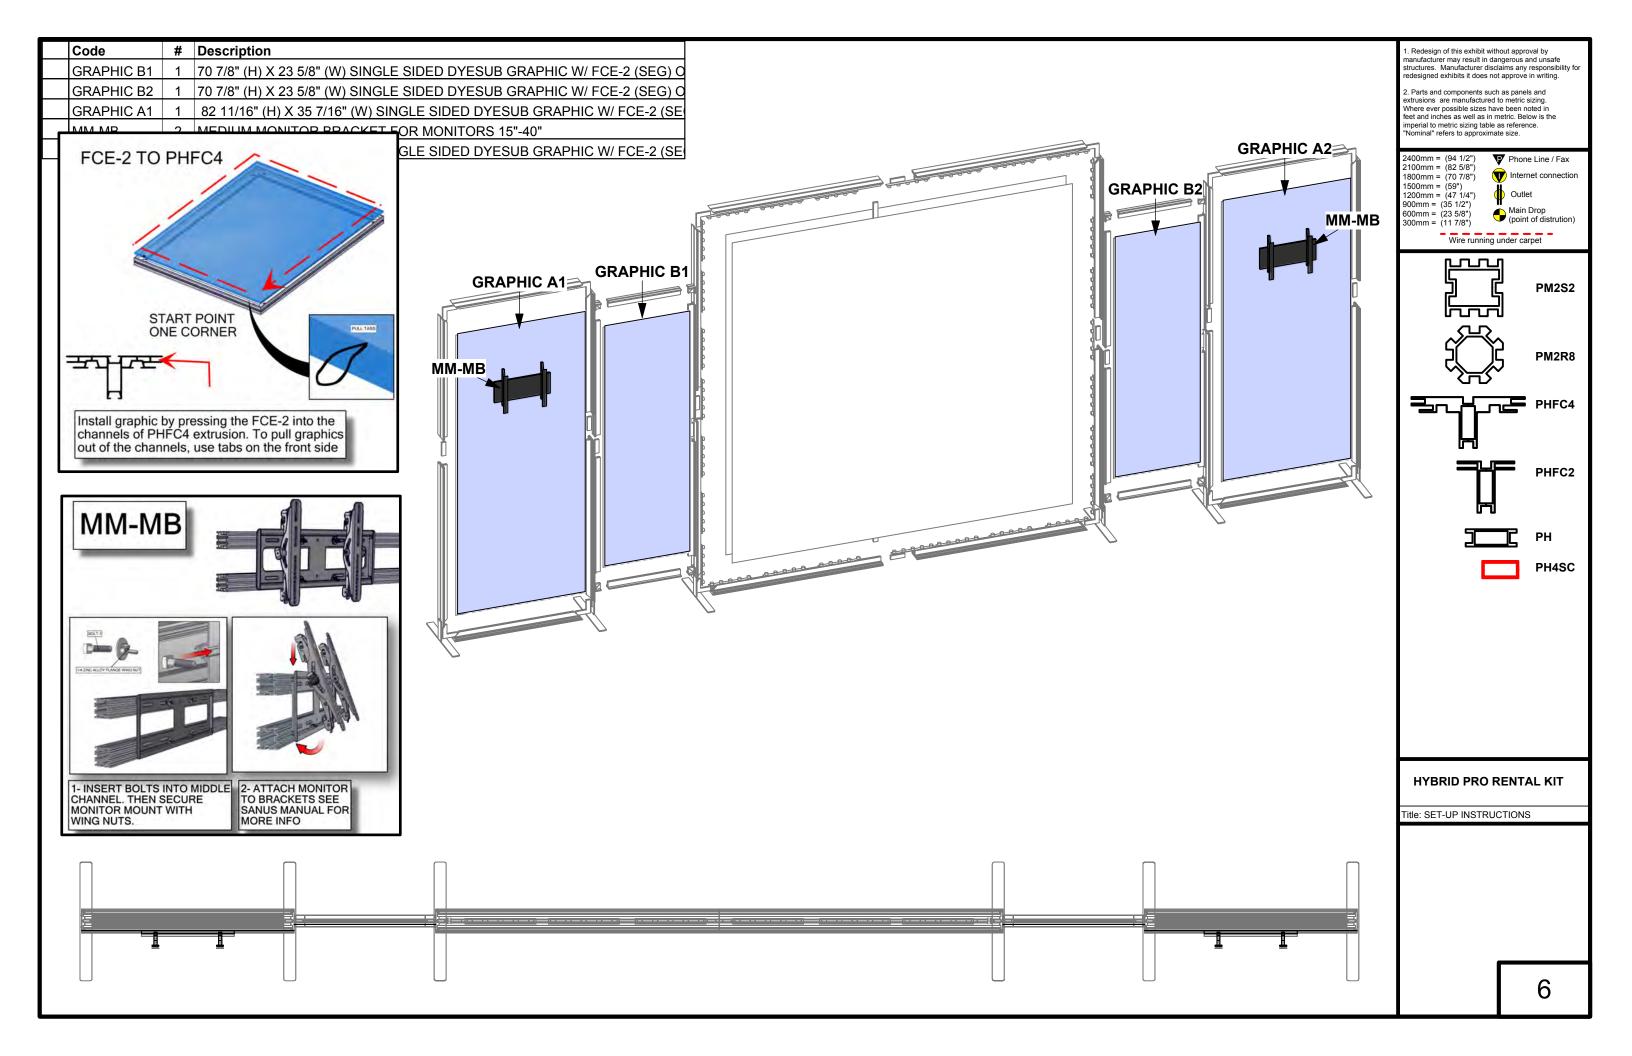

. Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility fo **SET UP INSTRUCTIONS:** redesigned exhibits it does not approve in writing. Frame 'A' Assembly 2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the CONNECT BOTTOM AND TOP RAILS FOLLOWING THE LABELS Assemble frame as shown 2. **CONNECT SIDE RAILS** imperial to metric sizing table as reference. "Nominal" refers to approximate size. 3. CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE CAREFULLY REMOVE FABRIC COVER FROM BAGS 2400mm = (94 1/2") 2100mm = (82 5/8") 4. Phone Line / Fax 5. PLACE COVER AROUND THE BOTTOM OF THE FRAME 1800mm = (70 7/8") 1500mm = (59") 1200mm = (47 1/4") 6. PULL COVER CAREFULLY UP TO THE TOP Outlet 7. CLOSE ALL ZIPPERS Main Drop (point of distrution) 600mm = (23 5/8") 300mm = (11 7/8") 8. ADJUST FABRIC AROUND THE FRAME Wire running under carpet **BREAK DOWN INSTRUCTIONS:** REVERSE SET-UP STEPS TO BREAKDOWN FRAME PM2S2 A11 **FABRIC CARE INSTRUCTIONS: A2**+ UNZIP COVER ZIPPERS PM2R8 2. CAREFULLY REMOVE FABRIC COVER 3. CLOSE ALL ZIPPERS (**A13**) 4. FOLD OR ROLL NEATLY PHFC4 5. PLACE FABRIC IN COVER BAG 1 SET CONSIST OF 2 FRAMES **PART LIST:** PHFC2 PER UNIT 30MM DIA. TUBE SECTIONS FABRIC COVER PH4SC **ZIPPERS** ZIPPER ON INSIDE OF THE-**FRAME HYBRID PRO RENTAL KIT** Title: SET-UP INSTRUCTIONS -GRAPHIC PILLOWCASE

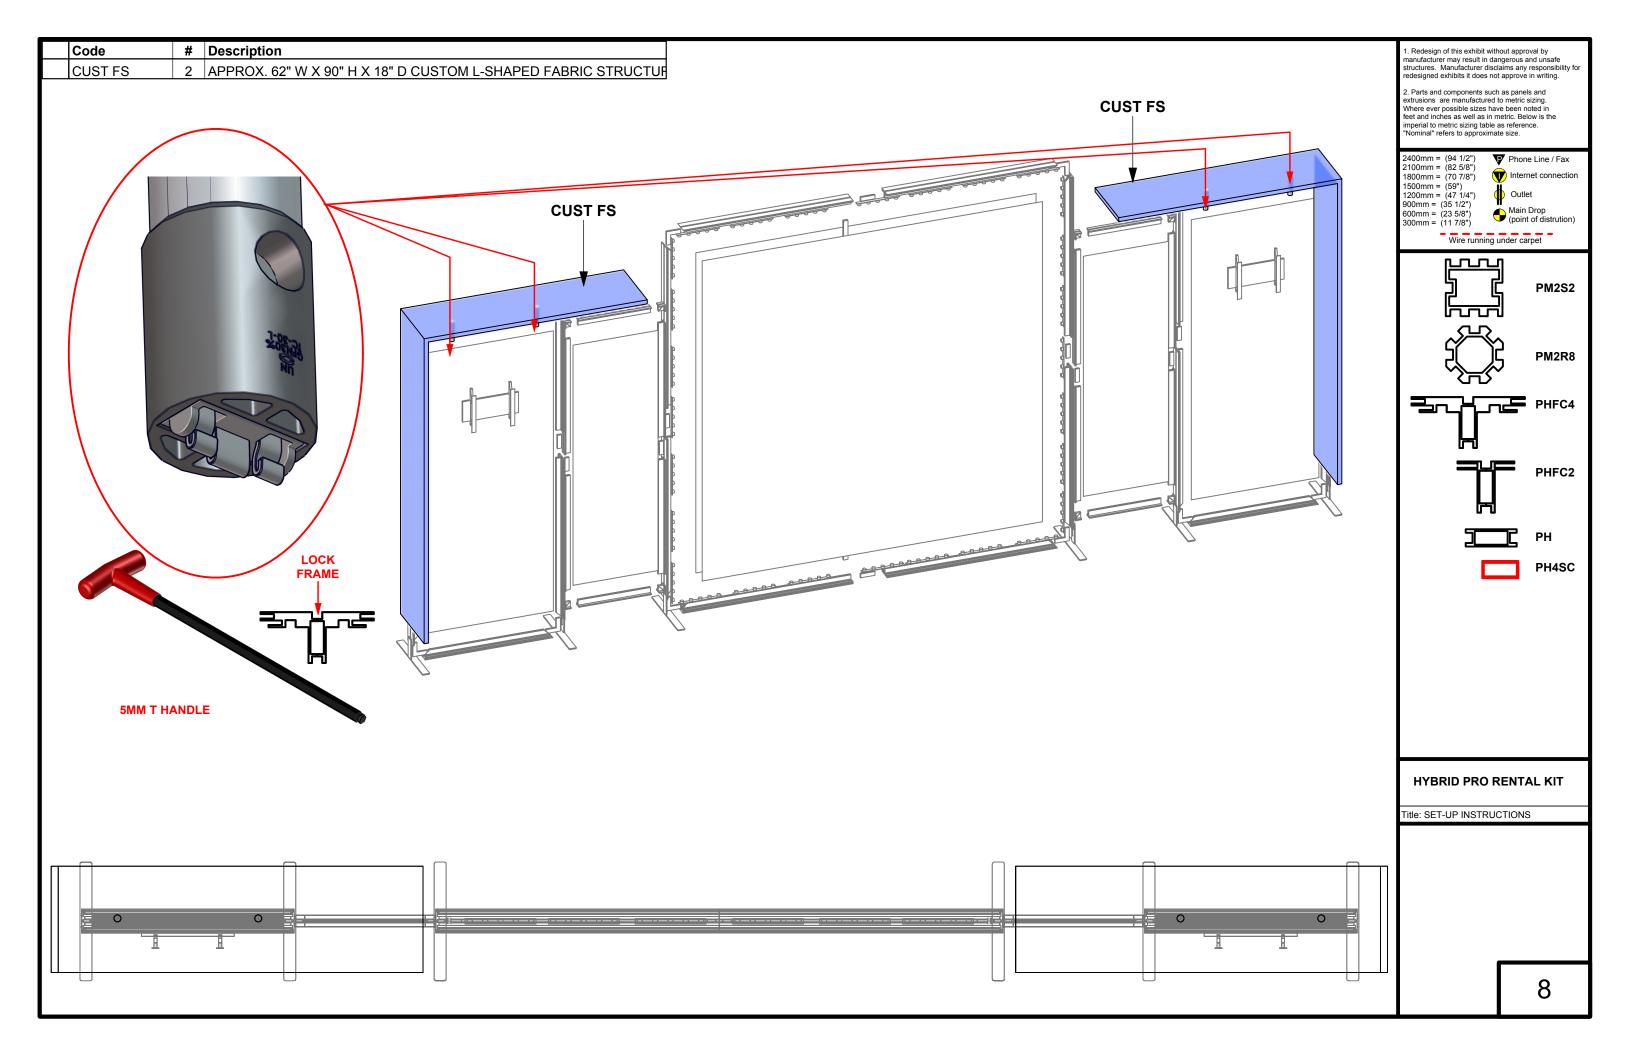

PACKING INSTRUCTIONS















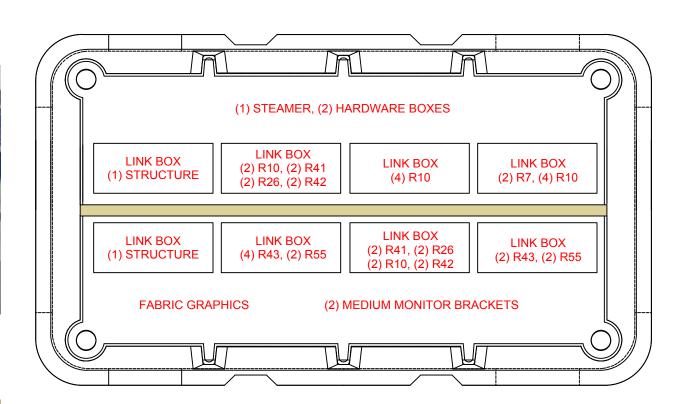









R-HPC-01-B

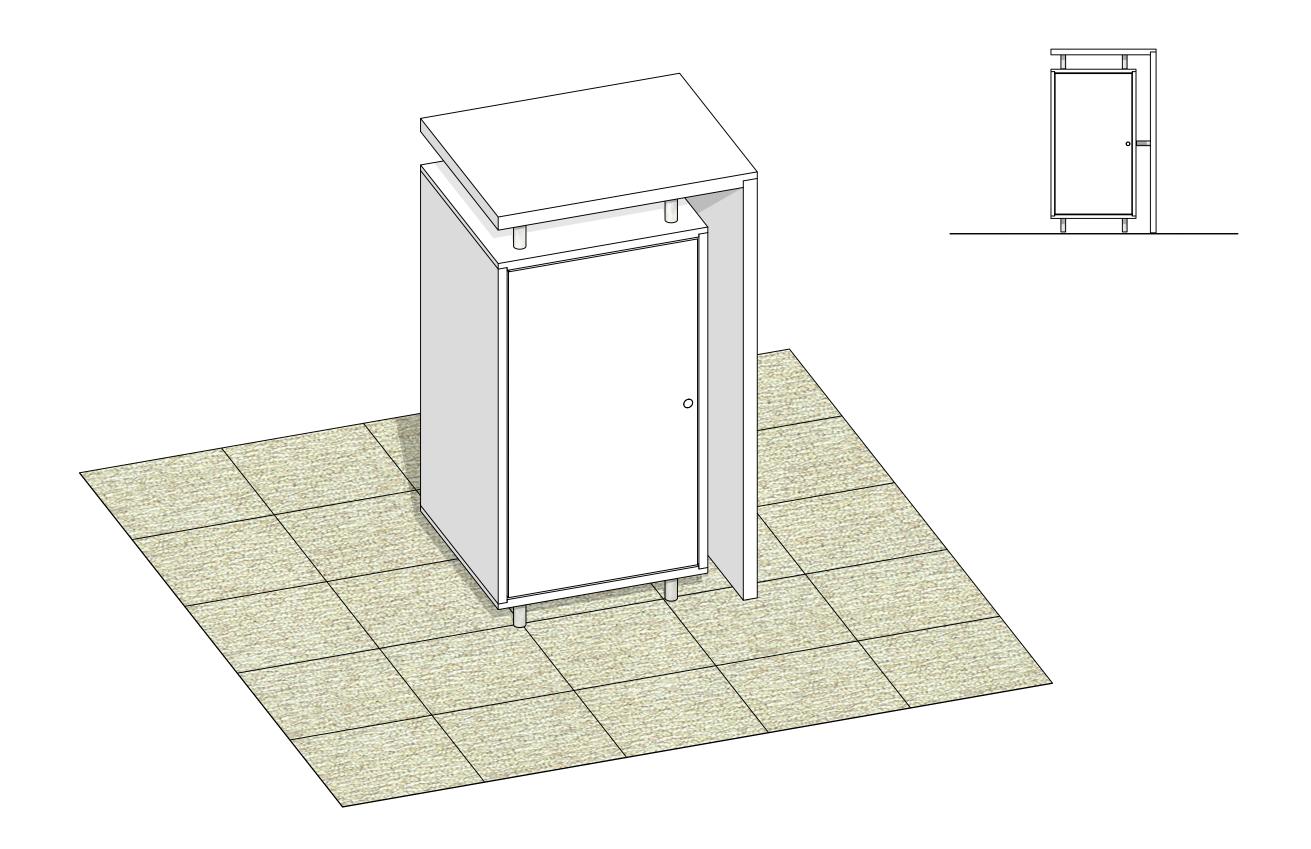



Code	#	Description
R-HPC-01-B-CT	2	4' X 2' X 2' L-SHAPED COUNTER TOP FOR R-HPC-01-A UNIT
SS4	8	SILVER SS4 SHELF SUPPORTS
SO-1 1/4 X 3	18	1 1/4" X 3" L STANDOFF ASSEMBLY
R-HPC-01-B-CAB	2	4' X 2" X 2' CUSTOM CABINET WITH SINGLE DOOR ON BACK (HIDDEN HINGES), INTERNAL SHELF AND WIRE N
R-HPC-01-A-INT	2	2' X 2' X 5/8" INTERNAL SHELF FOR HPC-01-B





R-HPC-01-B
(2) UNITS




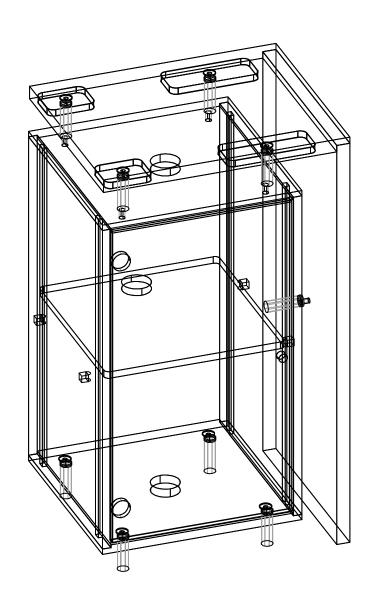

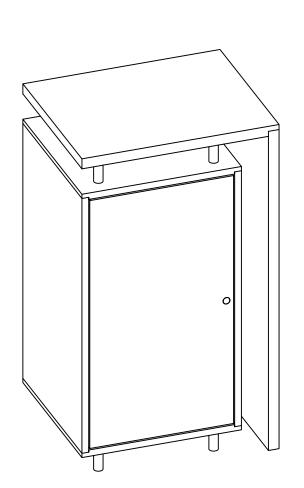

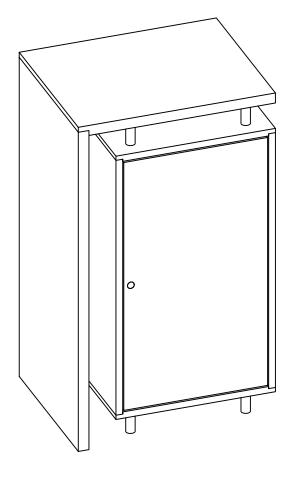

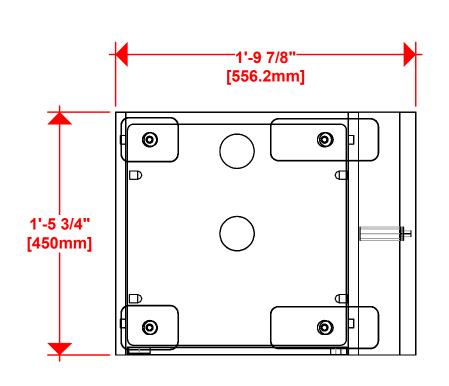

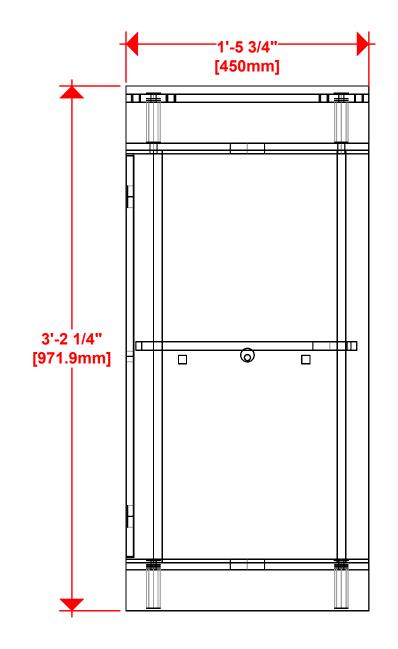


- Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.
- 2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2") 2100mm = (82 5/8") 1800mm = (70 7/8") 1800mm = (59") 1200mm = (47 1/4") 900mm = (35 1/2") 600mm = (23 5/8") 300mm = (11 7/8") Phone Line / Fax Internet connection Outlet

Main Drop (point of distrution) Wire running under carpet

PM2S2



PH




HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS


EP


Code # Description	Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe
SO-1 1/4 X 3 9 1 1/4" X 3" L STANDOFF ASSEMBLY PHOC 01 B C 1 4' Y 2" Y 2' CLISTOM CABINET WITH SINGLE DOOD ON BACK (HIDDEN HINGES). INTERNAL SHELE AND WIDE MANAGEMENT HOLES	 structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.
R-HPC-01-B-C 1 4" X 2" X 2" CUSTOM CABINET WITH SINGLE DOOR ON BACK (HIDDEN HINGES), INTERNAL SHELF AND WIRE MANAGEMENT HOLES	2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size. 2400mm = (94 1/2") 2100mm = (82 5/8") 1800mm = (70 7/8") 1500mm = (69") 1200mm = (47 1/4") 900mm = (35 1/2") 600mm = (23 5/8") 300mm = (11 7/8") Wire running under carpet PM2S2 PhFC4
R-HPC-01-B-CAB	PHFC2
	PH PH4SC
	HYBRID PRO RENTAL KIT Title: SET-UP INSTRUCTIONS


Code	#	Description
SS4	4	SILVER SS4 SHELF SUPPORTS
R-HPC-01-A-INT	1	2' X 2' X 5/8" INTERNAL SHELF FOR HPC-01-B






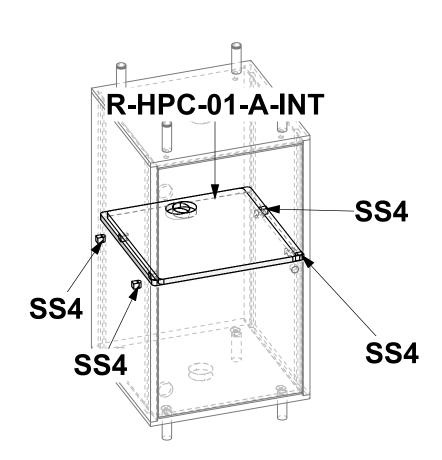



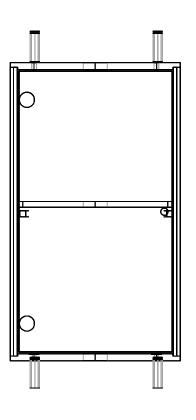





 Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.

Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")
2100mm = (82 5/8")
1800mm = (70 7/8")
1500mm = (59")
1200mm = (35 1/2")
900mm = (35 1/2")
600mm = (23 5/8")
300mm = (11 7/8")


Phone Line / Fax


Outlet

Outlet

(point of distrution)

Wire running under carpet





HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

2


Code	#	Description
R-HPC-01-B-CT	1	4' X 2' X 2' L-SHAPED COUNTER TOP FOR R-HPC-01-A UNIT












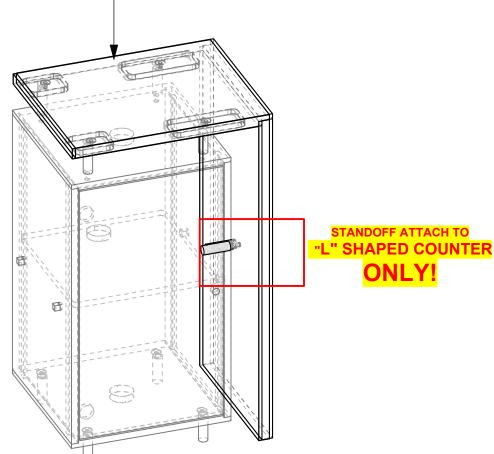




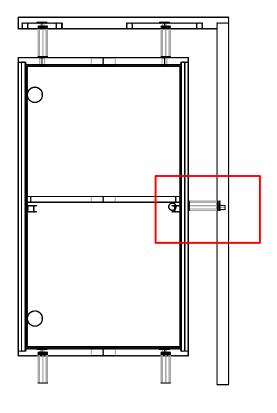




- Redesign of this exhibit without approval by manufacturer may result in dangerous and unsafe structures. Manufacturer disclaims any responsibility for redesigned exhibits it does not approve in writing.
- Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference.

 "Nominal" refers to approximate size.







HYBRID PRO RENTAL KIT

Title: SET-UP INSTRUCTIONS

3

PACKING INSTRUCTIONS



1 R-HPC-01-B

CASE#1



