

Custom Fusion Plus 20x20 Design 6

TensionLite Design Custom Fusion Plus provides an unparalleled dynamic that elevates and accentuates a message and brand, but also maximizes the return on trade show investment. Formulate Fusion is Origin's collection of 20ft x 20ft exhibit kits and custom solutions. A fusion of FORM, FABRIC and FUNCTION, these kits combine organic and architectural shapes with state-of-the-art zipper pillowcase dye-sublimated fabric graphics to create unique, dynamic and functional island space.



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:


- 20' x 20' island display
- Heavy-duty aluminum frames create a space that fosters traffic flow
- Oval-shaped fabric reception counter provides a functional greeting area
- A curved wall create semi-private meeting/ conference area or projection wall
- Kit includes: frame and dye-sublimated zipper pillowcase fabric graphic for three towers, connecting exposed aluminum tube, four oval-shaped sintra graphic panels, reception counter, chip-shaped wall, six monitor mounts, and 1 woodcrate.
- Lifetime hardware warranty against manufacturer defects

dimensions:

Hardware	Graphic
Assembled unit – Fabric Tower Structure: 303”w x 144”h x 42.87”d	Total visual area: Chip wall: Inside –179”w x 96”h Outside – 181”w x 96”h
Chip-wall: 111”w x 96”h x 61.89”d Oval counter: 47.25”w x 38”h x 23.75”d	Oval counter: 57.629”w x 35.424”h
*Additional dimensions on interior pages	Please be sure to include 5” bleed around the perimeter of all graphics.
Shipping	Refer to related graphic template for more information.
Shipping dimensions - ships in 1 woodcrate: 101”l x 49”h x 59”d 2565mm(l) x 1245mm(h) x 1346mm(d)	
Approximate shipping weight: 1236 lbs / 560.6 kgs	

additional information:

Graphic material:Dye-sublimated zipper pillowcase fabric and sintra panels	*Monitors and flooring not included
Internal LED lights are not included, can be purchased a la carte.	Base Finishes:
6 monitor mounts - max monitor sizes and weights can vary	<div><div></div><div></div><div></div><div></div></div> <div>silverblackmahoganynatural</div>

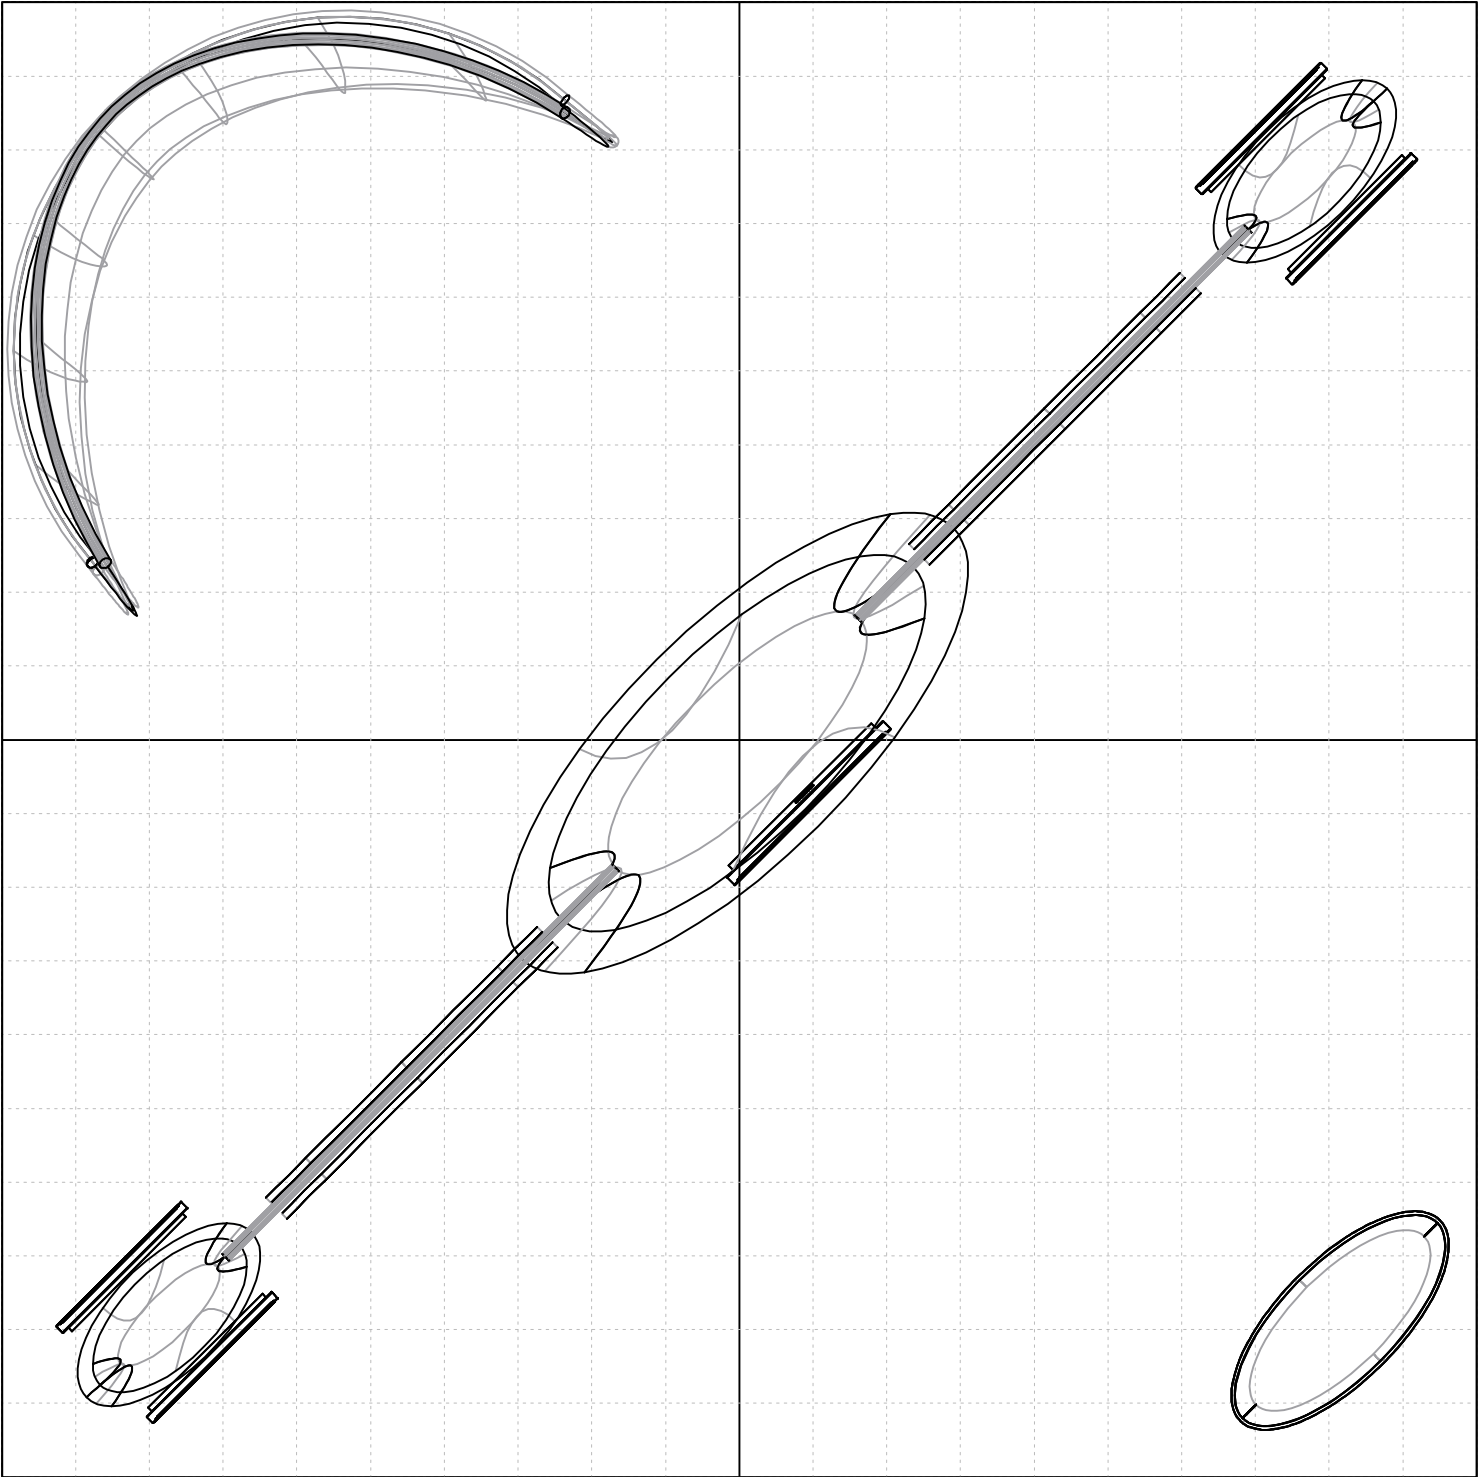

1. Redesign of this exhibit without approval by Manufacture may result in dangerous and unsafe structures.Manufacture disclains any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")
2100mm = (82 5/8")
1800mm = (70 7/8")
1500mm = (59")
1200mm = (47 1/4")
900mm = (35 1/2")
600mm = (23 5/8")
300mm = (11 7/8")

▽ Phone Line / Fax

▽ Internet connection

▽ Outlet


▽ Main Drop (point of distrution)

--- Wire running under carpet

Client: CFAB-K-5

Title: SET-UP INSTRUCTIONS

FUSION 20 X 20 KIT
CFAB-K-06

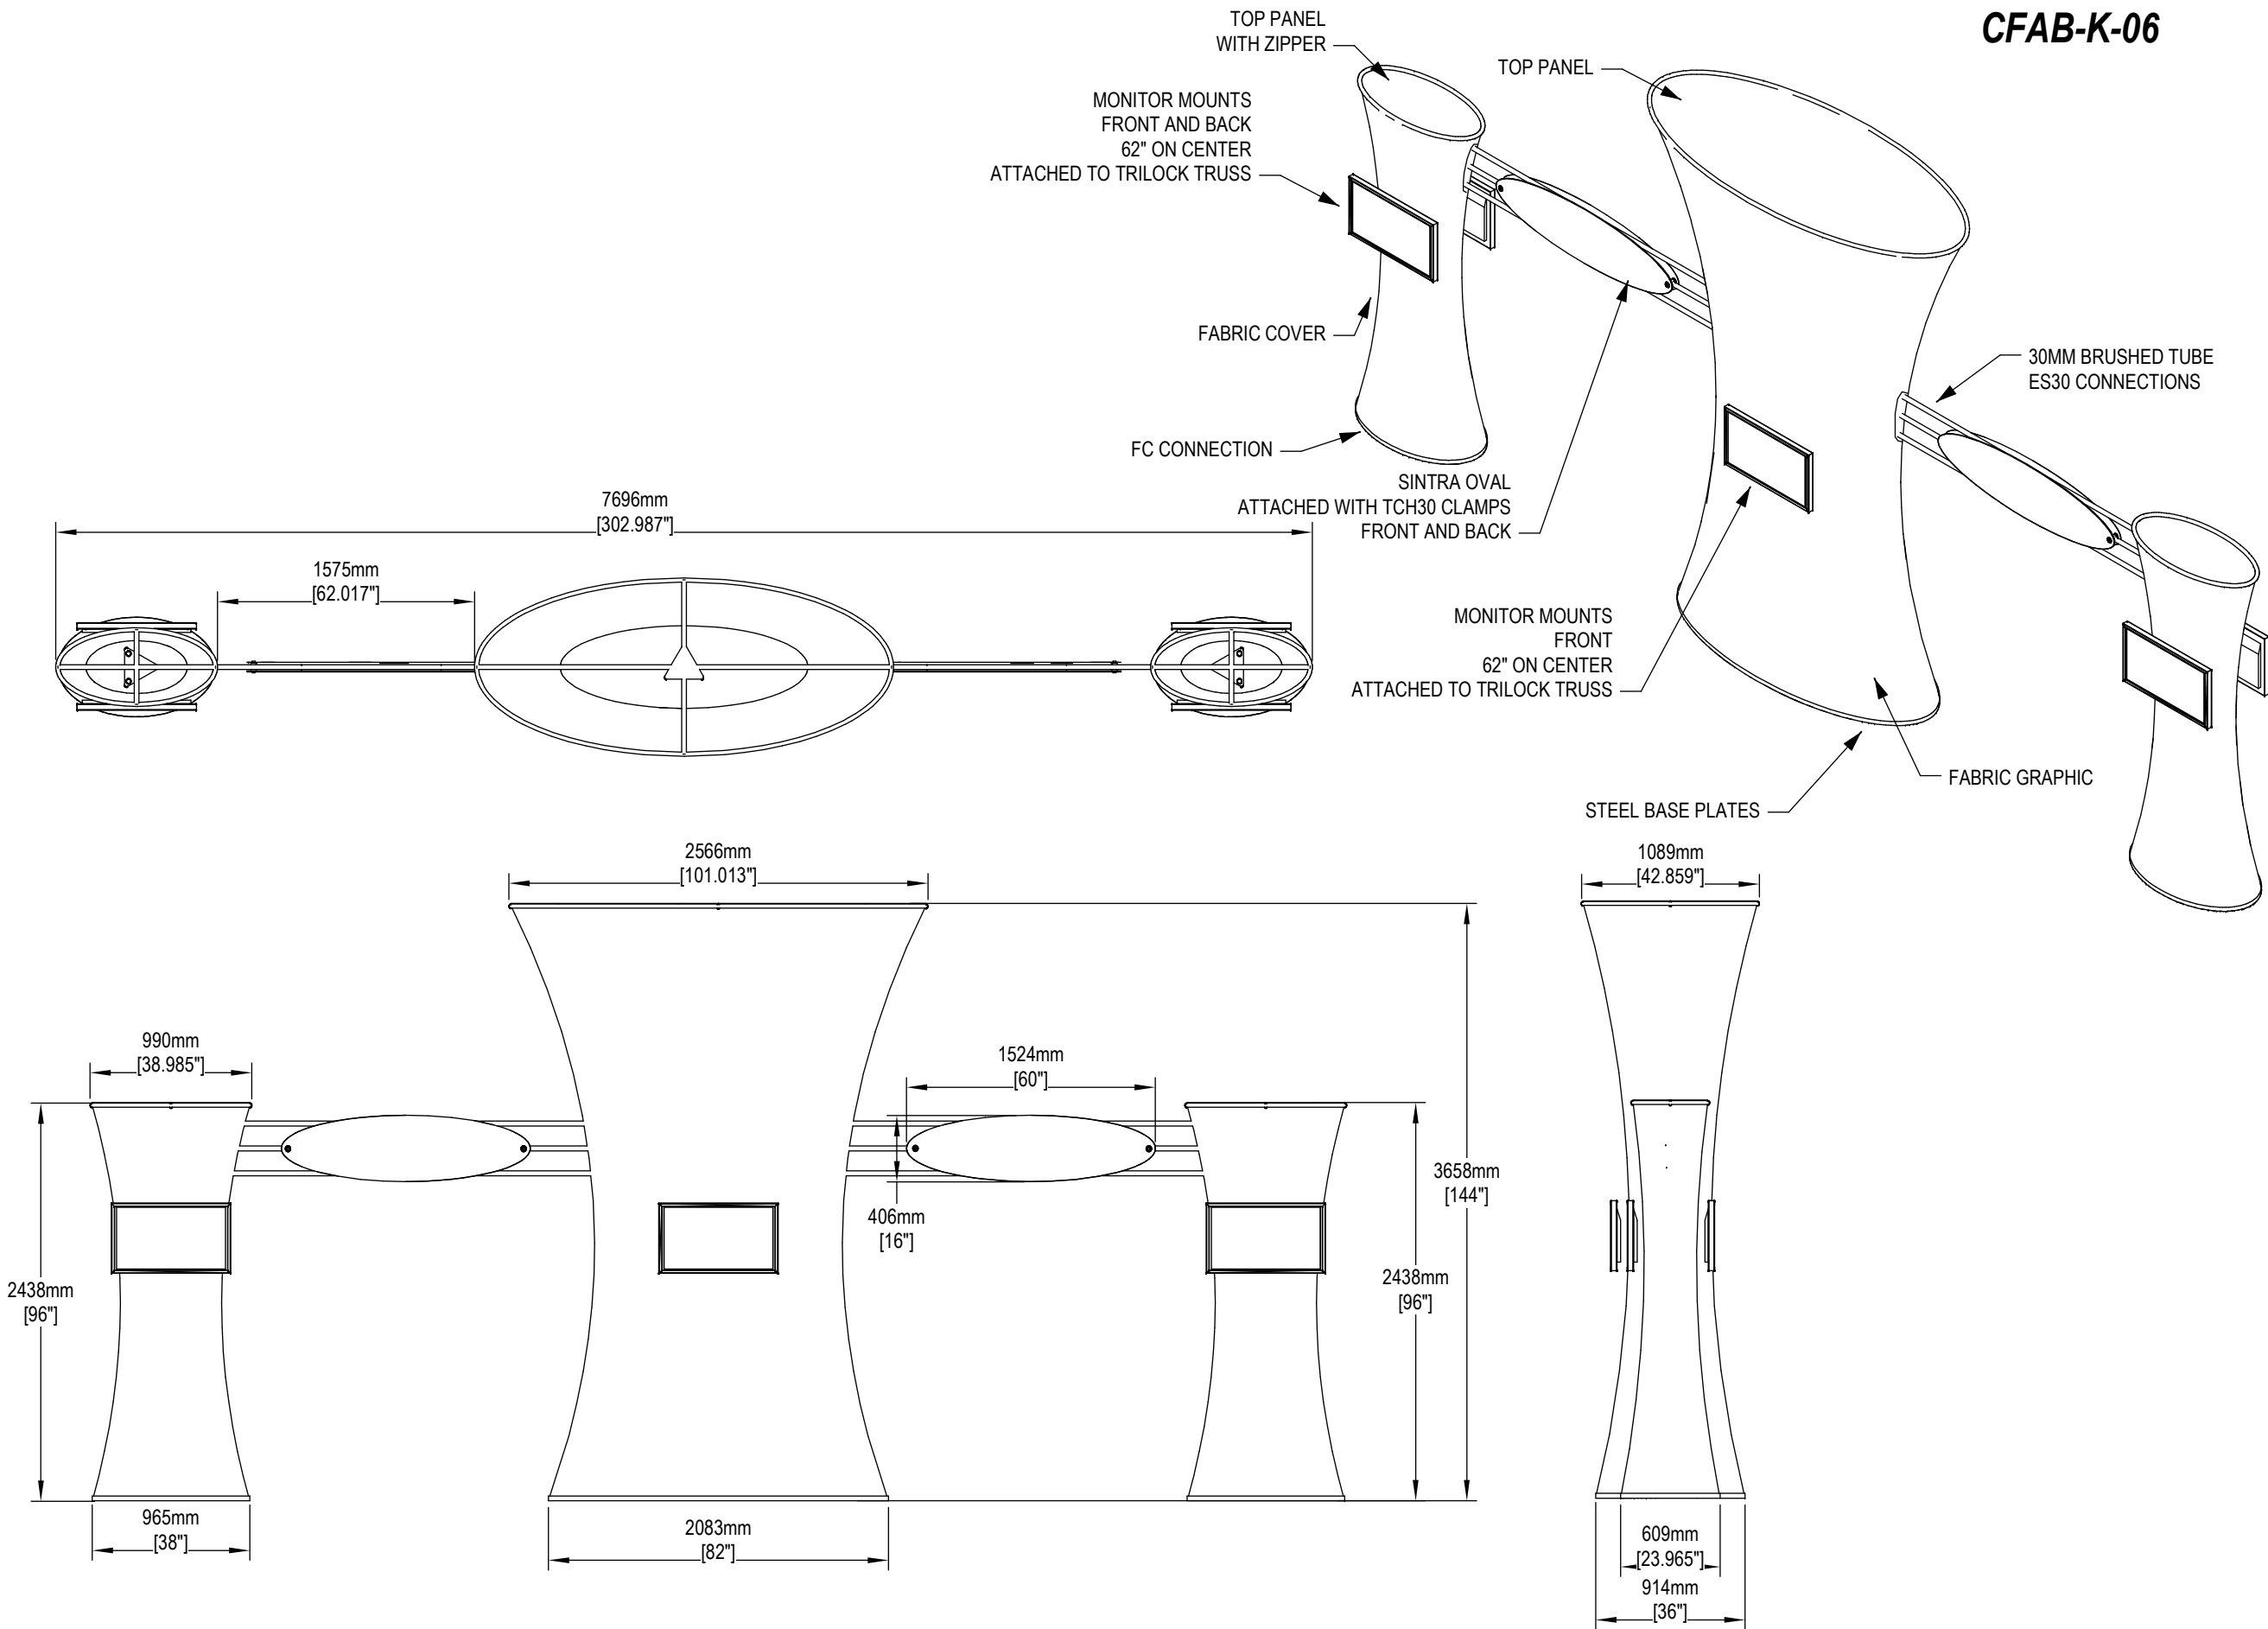

Order #:	
Client	
Dist.	
Dept.	
Man.	
Set up	
Preview	
Ship	
Item	Qty
Packing	
Graphics Size	
Project Manager	
File Name	
Detailer	Date
Description	
MAX. ALLOWABLE TOLERANCES PER 2400mm FABRICATION = ±4mm	
CHECKED BY: _____ DATE: _____	

SET UP INSTRUCTIONS:

- 1. CONNECT BOTTOM AND TOP RAILS FOLLOWING THE LABELS
- 2. CONNECT SIDE RAILS
- 3. CLEAN THE FRAME AND PLACE THEM ON CLEAN PLACE
- 4. CAREFULLY REMOVE FABRIC COVER FROM BAGS
- 5. PLACE COVER AROUND THE BOTTOM OF THE FRAME
- 6. PULL COVER CAREFULLY UP TO THE TOP
- 7. CLOSE ALL ZIPPERS
- 8. ADJUST FABRIC AROUND THE FRAME

BREAK DOWN INSTRUCTIONS:

REVERSE SET-UP STEPS TO BREAKDOWN FRAME

FABRIC CARE INSTRUCTIONS:

- 1. UNZIP COVER ZIPPERS
- 2. CAREFULLY REMOVE FABRIC COVER
- 3. CLOSE ALL ZIPPERS
- 4. FOLD OR ROLL NEATLY
- 5. PLACE FABRIC IN COVER BAG

SMALL TOWERS PART LIST:

FOR 2 UNITS

- 12 30MM DIA. TUBE SECTIONS
- 18 ES-30 EXPANDING SPIGOT
- 1 2.5MM HEX KEY
- 2 STEEL BASE PLATES "B"
- 4 TRUSS ENDCAPS
- 22 M8 TRUSS BOLTS
- 2 FABRIC COVER

LARGE TOWERS PART LIST:

FOR 1 UNIT

- 15 30MM DIA. TUBE SECTIONS
- 15 ES-30 EXPANDING SPIGOT
- 1 2.5MM HEX KEY
- 2 TRUSS ENDCAPS
- 1 STEEL BASE PLATES "A"
- 15 M8 TRUSS BOLTS
- 1 FABRIC COVER

USE TRUSS BOLTS AND WING NUTS TO CONNECT TRUSSES

BASE PLATE 'B'

TRUSS WEBBING IS NOT SHOWN FOR BETTER VISIBILITY

BASE PLATE 'A'


Frames 'A' and 'B' Assembly

Assemble frame as shown

1. Redesign of this exhibit without approval by Manufacture may result in dangerous and unsafe structures.Manufacture disclains any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	
Wire running under carpet	

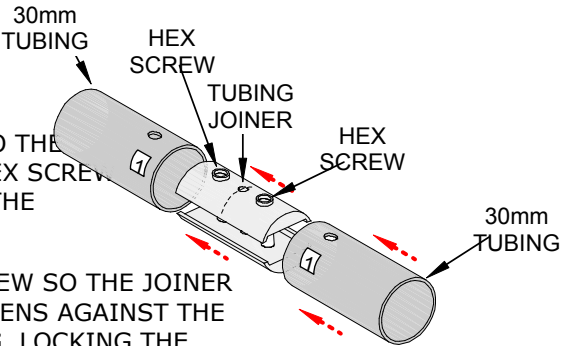

STEP 1

SLIDE THE JOINER INTO THE TUBING SO THE THE HEX SCREW SITS IN THE HOLE ON THE TUBING


STEP 2

TIGHTEN THE HEX SCREW SO THE JOINER SEPERATES AND TIGHTENS AGAINST THE INSIDE OF THE TUBING, LOCKING THE JOINER AND TUBING TOGETHER


Client:

CFAB-K-5


Title: SET-UP INSTRUCTIONS

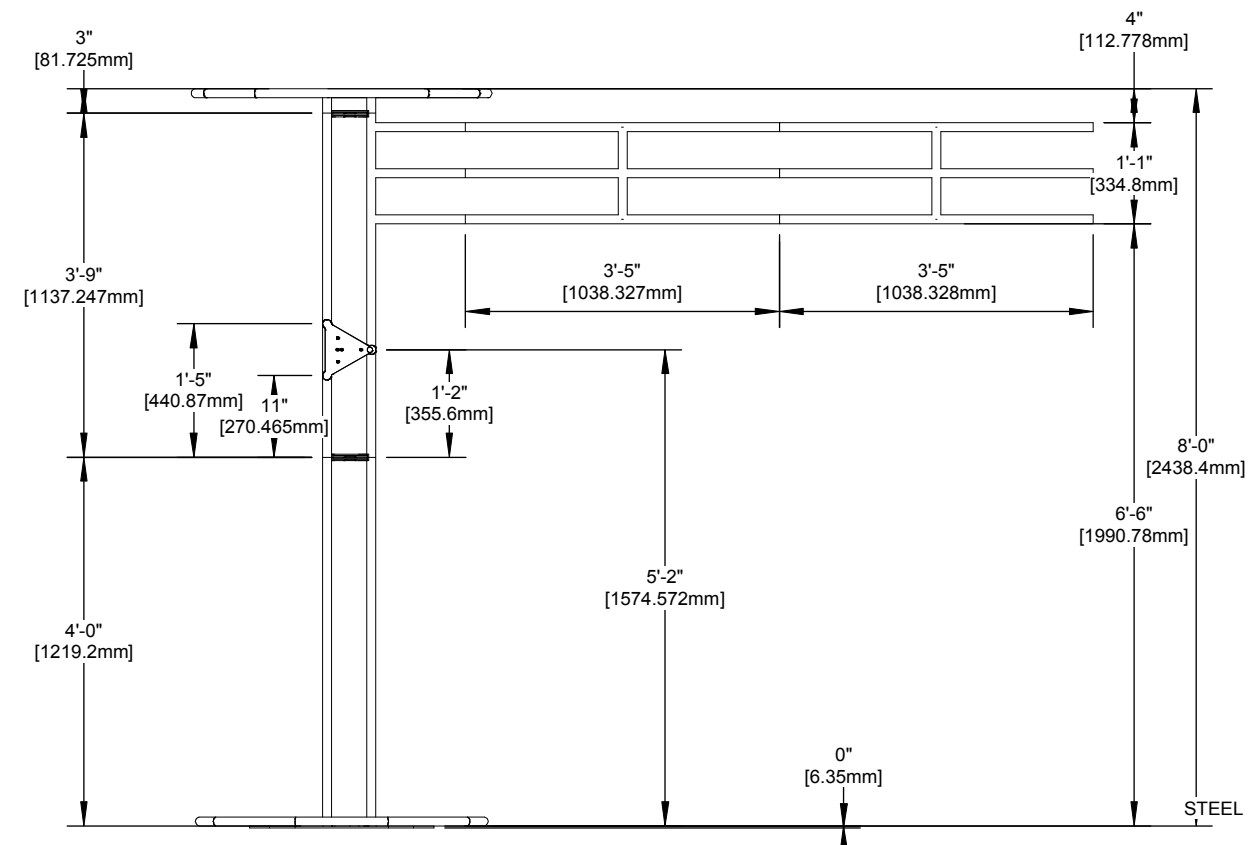

FRONT VIEW

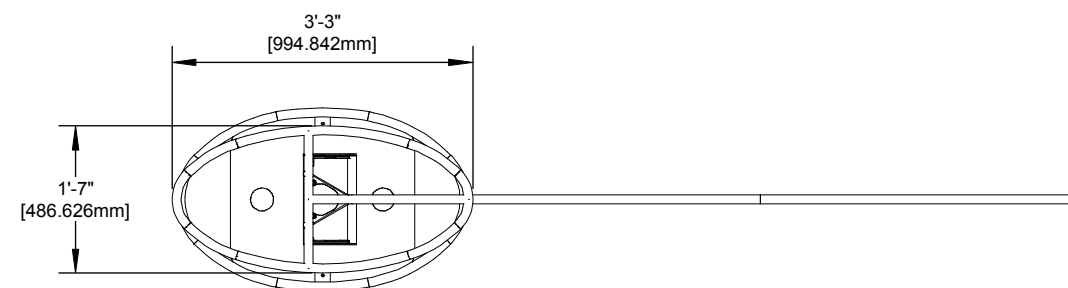


TOP VIEW

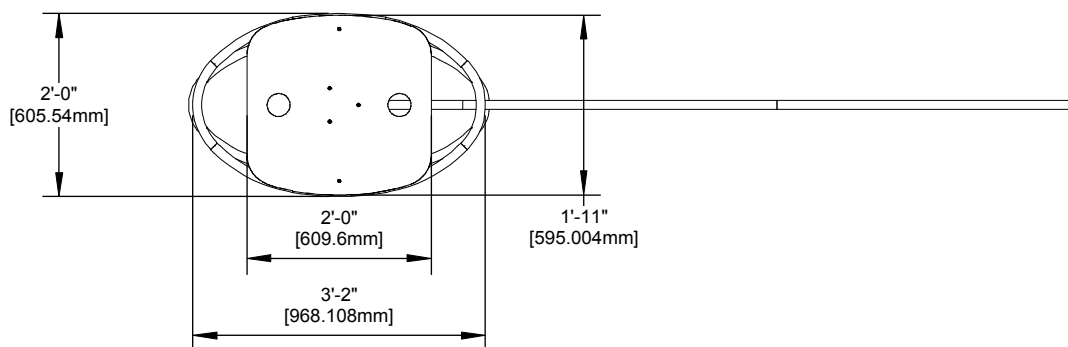

BOTTOM VIEW

ISOMETRIC

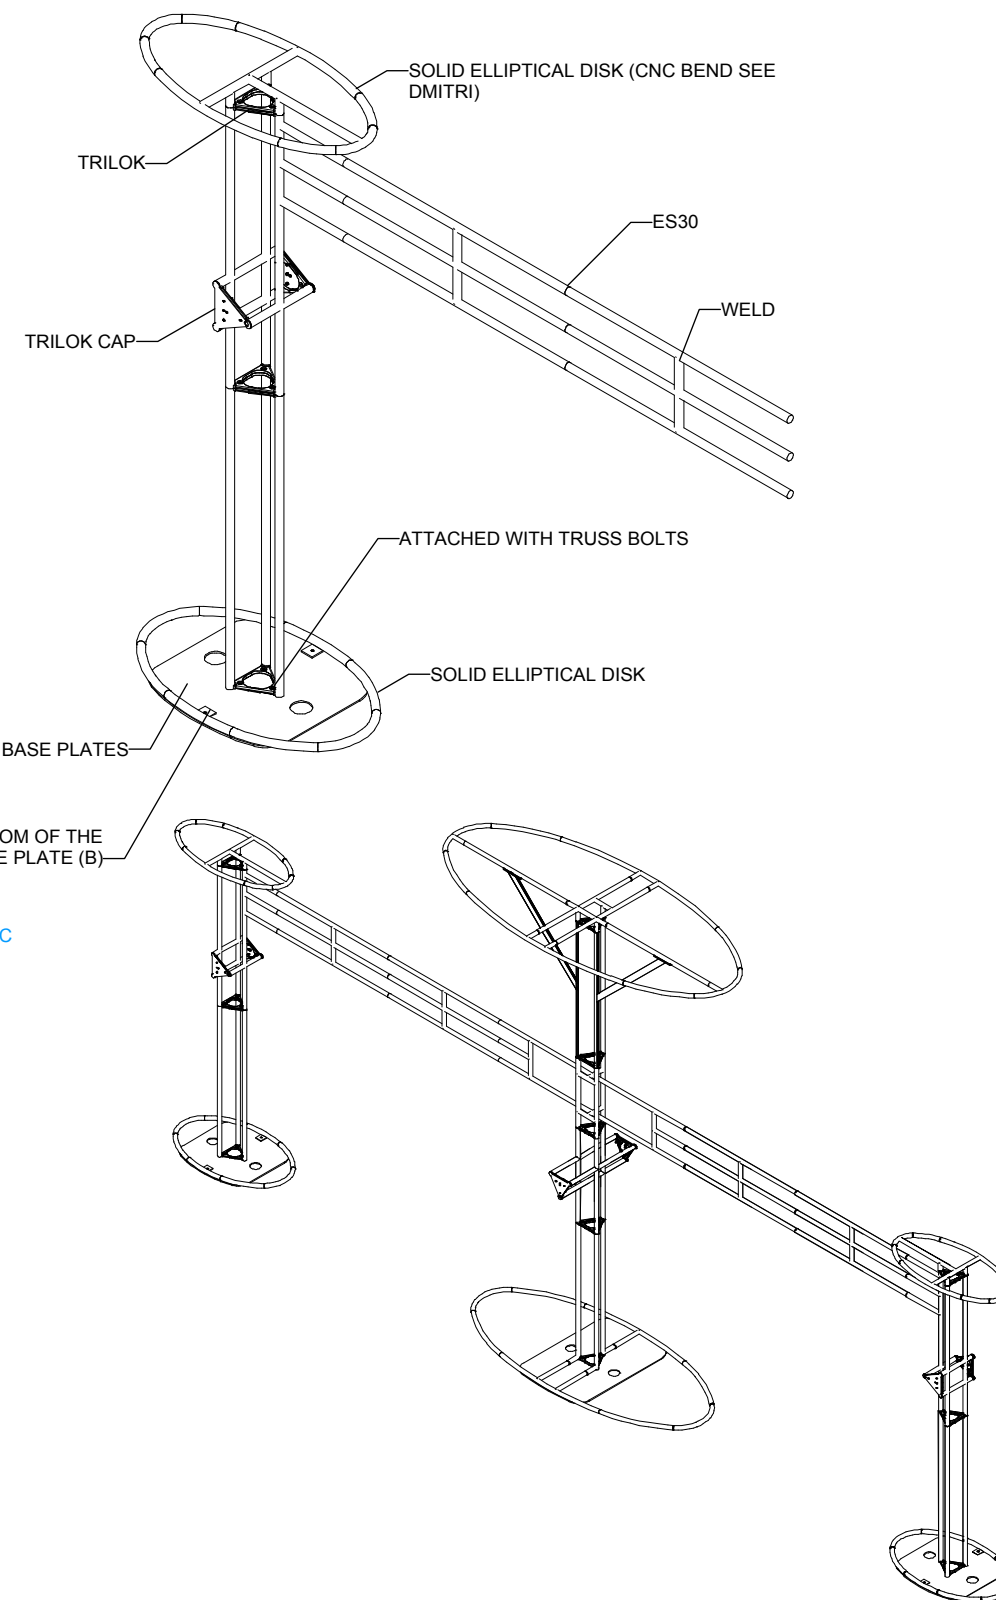

1. Redesign of this exhibit without approval by Manufacture may result in dangerous and unsafe structures. Manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet

Client:

CFAB-K-5

Title: SET-UP INSTRUCTIONS



LEFT SIDE




MIDDLE



RIGHT SIDE



HARDWARE

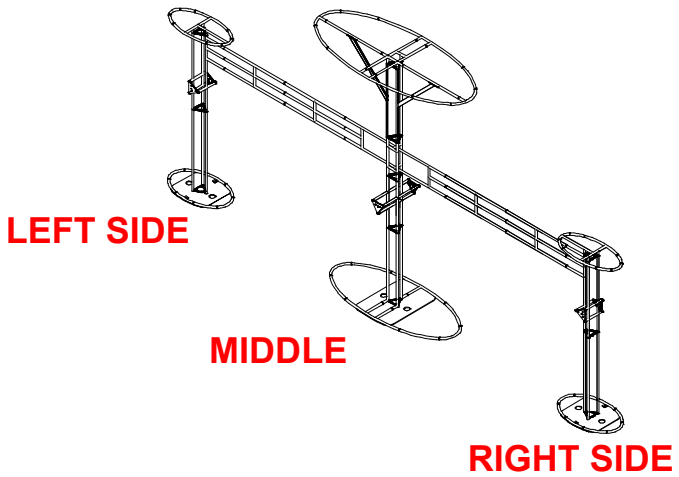

LEFT SIDE

MIDDLE

RIGHT SIDE


1. Redesign of this exhibit without approval by Manufacture may result in dangerous and unsafe structures. Manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.


2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	
Wire running under carpet	

Client: CFAB-K-5

Title: SET-UP INSTRUCTIONS

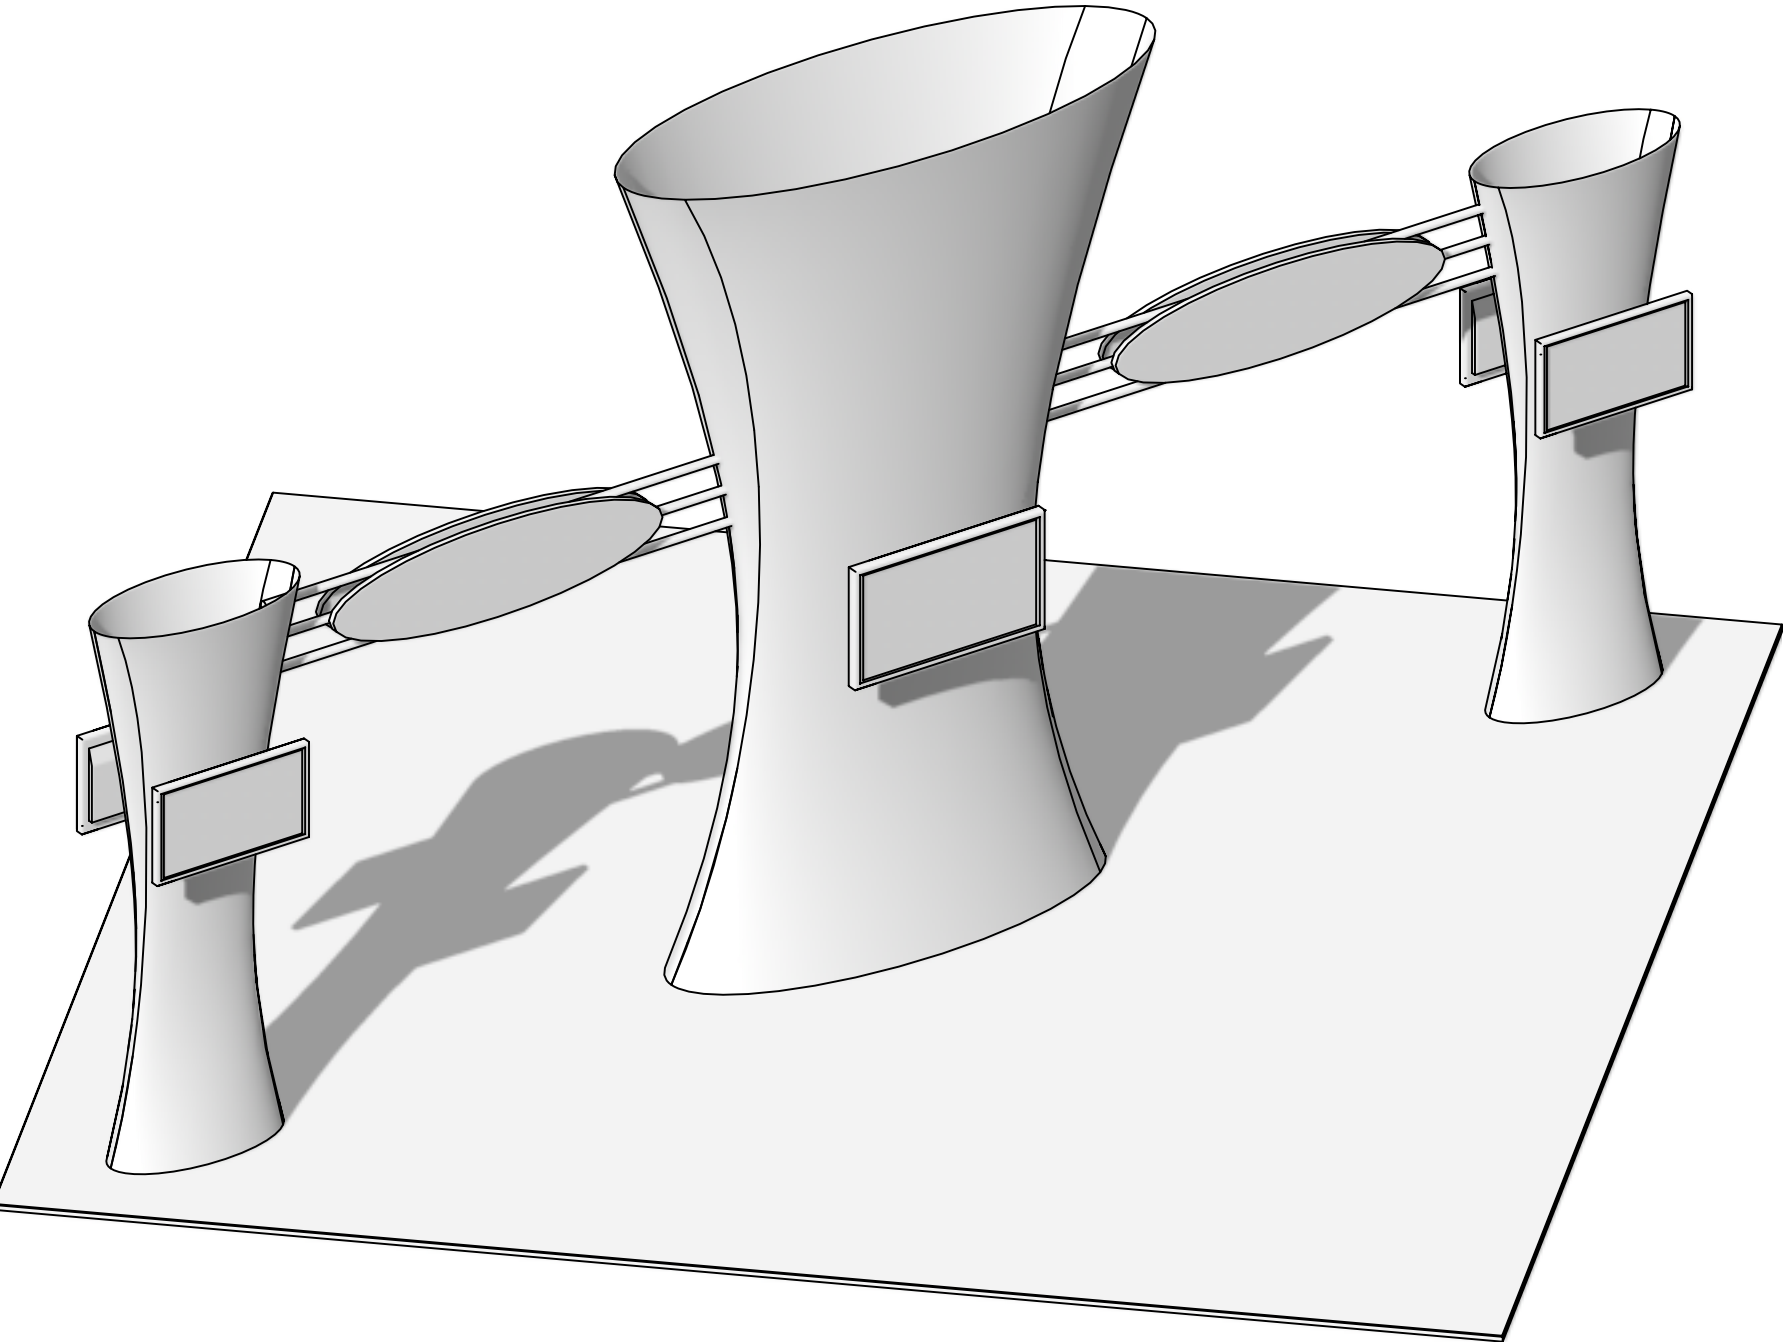


8X

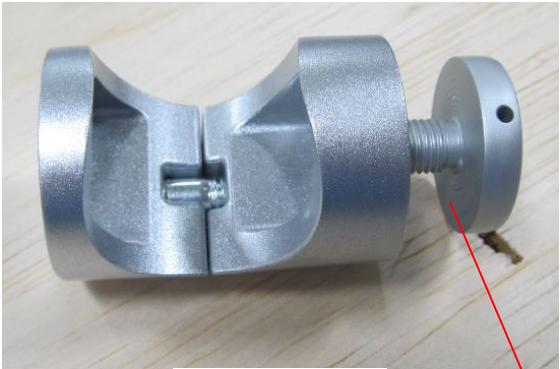

HARDWARE

TO ATTACH
SINTRA
HEADER

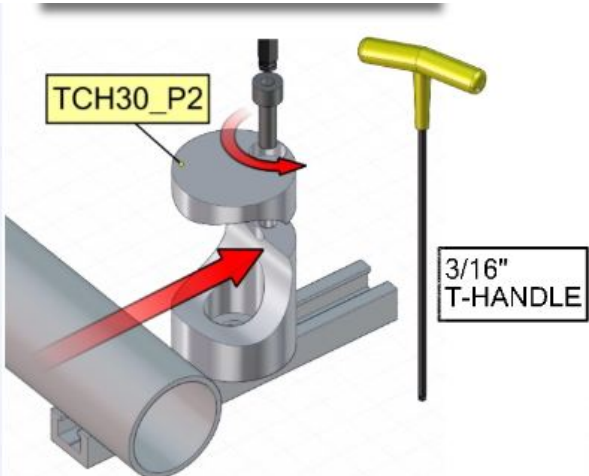

1. Redesign of this exhibit without approval by Manufacture may result in dangerous and unsafe structures.Manufacture disclaims any responsibility for redesigned exhibits it does not approve in writing.

2. Parts and components such as panels and extrusions are manufactured to metric sizing. Where ever possible sizes have been noted in feet and inches as well as in metric. Below is the imperial to metric sizing table as reference. "Nominal" refers to approximate size.

2400mm = (94 1/2")	Phone Line / Fax
2100mm = (82 5/8")	Internet connection
1800mm = (70 7/8")	Outlet
1500mm = (59")	Main Drop (point of distrution)
1200mm = (47 1/4")	
900mm = (35 1/2")	
600mm = (23 5/8")	
300mm = (11 7/8")	

Wire running under carpet

Client: CFAB-K-5

Title: SET-UP INSTRUCTIONS

PACKING INSTRUCTIONS



TOP

9 TRILOK /
MONITOR MOUNTS
CHIP WALL
HARDWARE ITEMS
FABRIC GRAPHICS

8 TRILOK

7 TUBES

6 TUBES

5 TUBES

4 TUBES

3 TUBES

2 CFAB-K-06 - BASES

1 FORMULATE COUNTER
W-05-C - BASES

BOTTOM




CASE# 1



BOTTOM

Custom Fusion Plus

TensionLite Custom Fusion Plus fabric conference walls are lightweight, stylish solutions to your meeting space needs. Ergonomically designed, Formulate C-shaped and Serpentine-shaped walls combine the latest developments in fabric printed technology with gently curved 50mm aluminum frames to create private, cozy and stylish conference areas within any space.

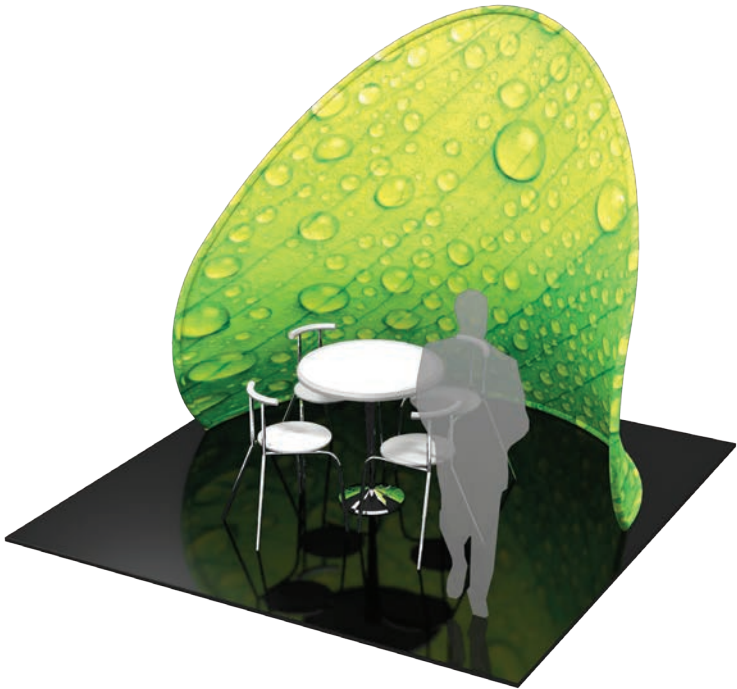

We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- State-of-the-art 50mm curved aluminum tube frame with sturdy internal spigots
- Potato chip shaped structure
- Ideal to create a semi-private conference/ meeting area or projection wall
- Kit includes: one frame, one dye-sublimated zipper pillowcase graphic, and one wheeled molded OCE storage case
- Lifetime hardware warranty against manufacturer defects

dimensions:


Hardware	Graphic
Assembled unit: 111”w x 96”h x 61.894”d 2819mm(w) x 2438mm(h) x 1572mm(d) Approximate weight (includes graphic): 42.55 lbs / 19.3 kg	Total visual area: Inside: 179”w x 96”h 4547mm(w) x 2438mm(h) Outside: 181”w x 96”h 4597mm(w) x 2438mm(h) Single sided chip walls have inside printed only. Please be sure to include 5” bleed around the perimeter. Refer to related graphic template for more information.
Shipping Shipping dimensions: 1 OCE case: 18”l x 18”w x 40” up to 66”h 457mm(l) x 457mm(w) x 1016mm(h) up to 1675mm(h) Approximate shipping weight (with case): 62.55 lbs / 28.8 kg	

additional information:

Graphic material: Dye-sublimated zipper pillowcase fabric	 www.display-setup-animations.com
--	---

Parts Included


Part Label	Qty	Part Code
50MM CURVE WITH SPREADER	x1	CHIP-WALL-T3-SP
50MM CURVE	x2	CHIP-WALL-T1
50MM CURVE	x2	CHIP-WALL-T3
50MM CORNER	x2	CHIP-WALL-T2
50MM CURVE	x2	CHIP-WALL-T5
50MM CURVE	x2	CHIP-WALL-T6
30MM CURVED SPREADER	x2	CHIP-WALL-T4
50MM CURVE WITH SPREADER	x1	CHIP-WALL-T7
EXPANDING SPIGOT FOR 30MM TUBE	x2	ES-30
EXPANDING SPIGOT FOR 50MM TUBE	x12	ES-50
CHIP WALL FABRIC GRAPHIC	x1	CHIP-WALL-G

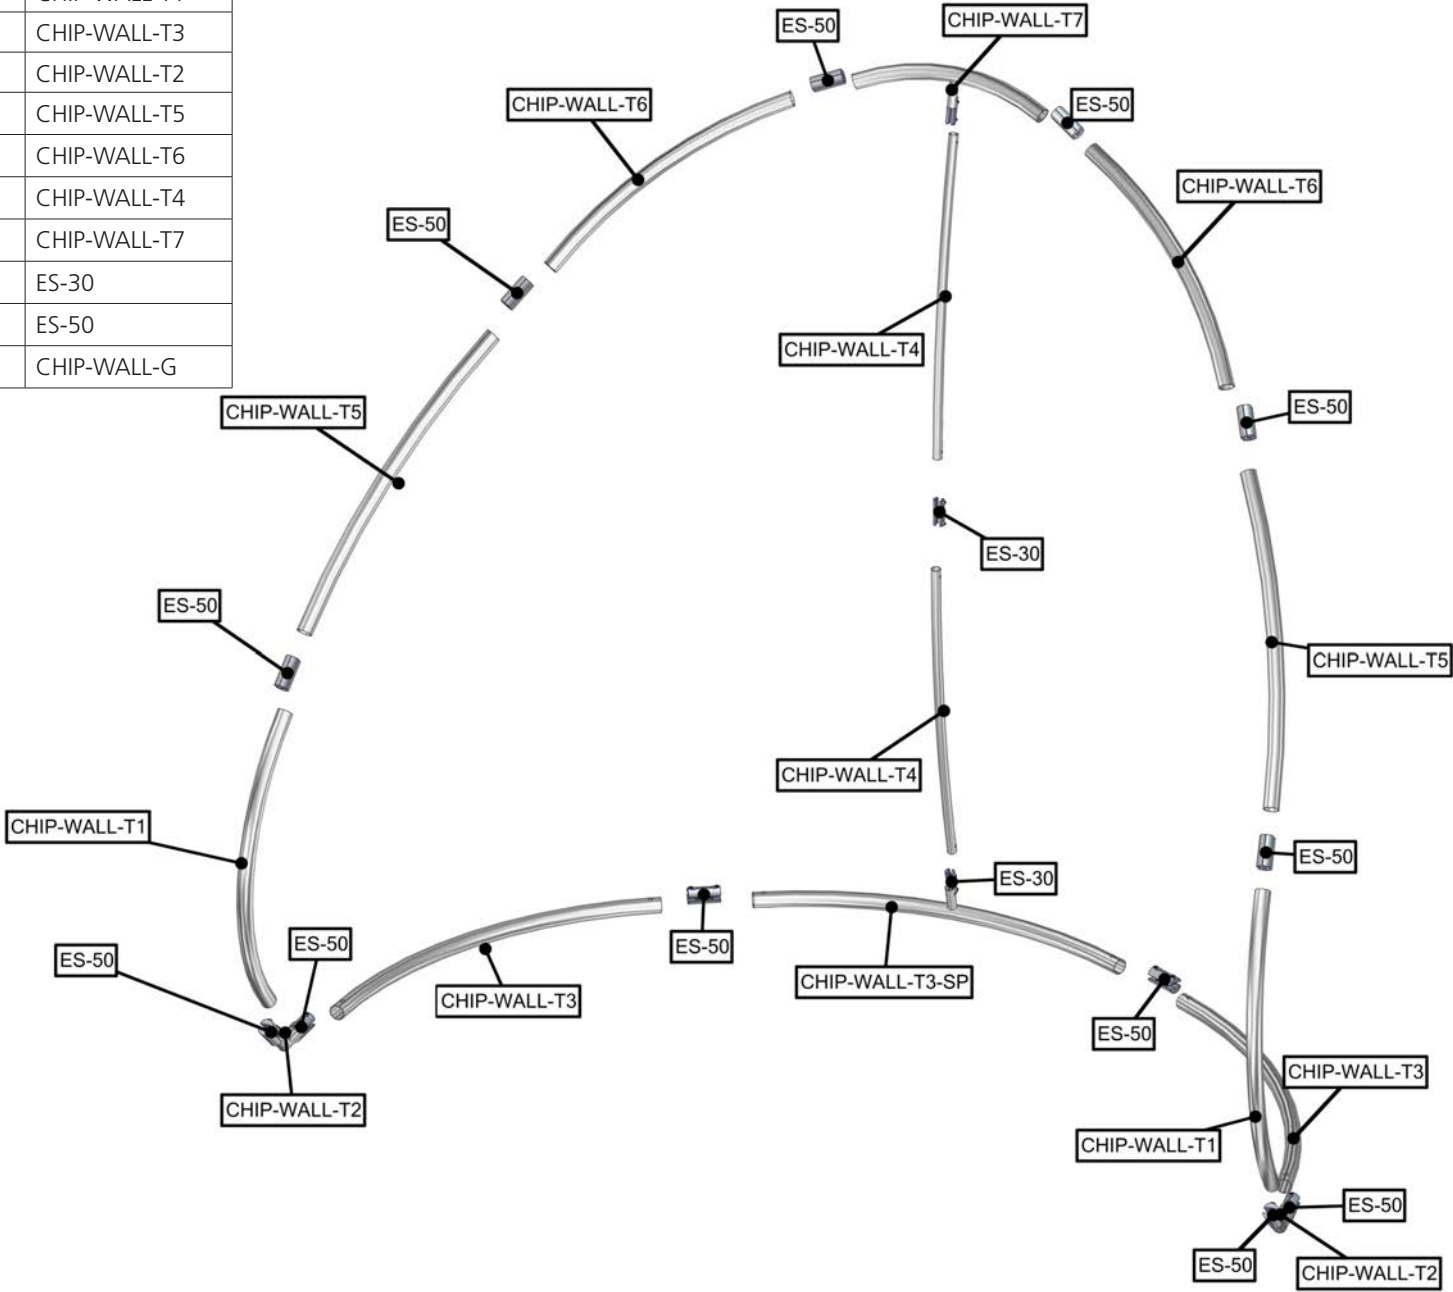





CHIP-WALL FRAME ASSEMBLY:

Assemble unit by laying tubes flat on the floor. Connect the tube rails following the labels by matching number to number.




Slide joiner into tubing so hex screw sits in hole on tubinger. Tighten the hex screw so the joiner separates and tightens against the inside of the tubing, locking the joiner and tubing together.

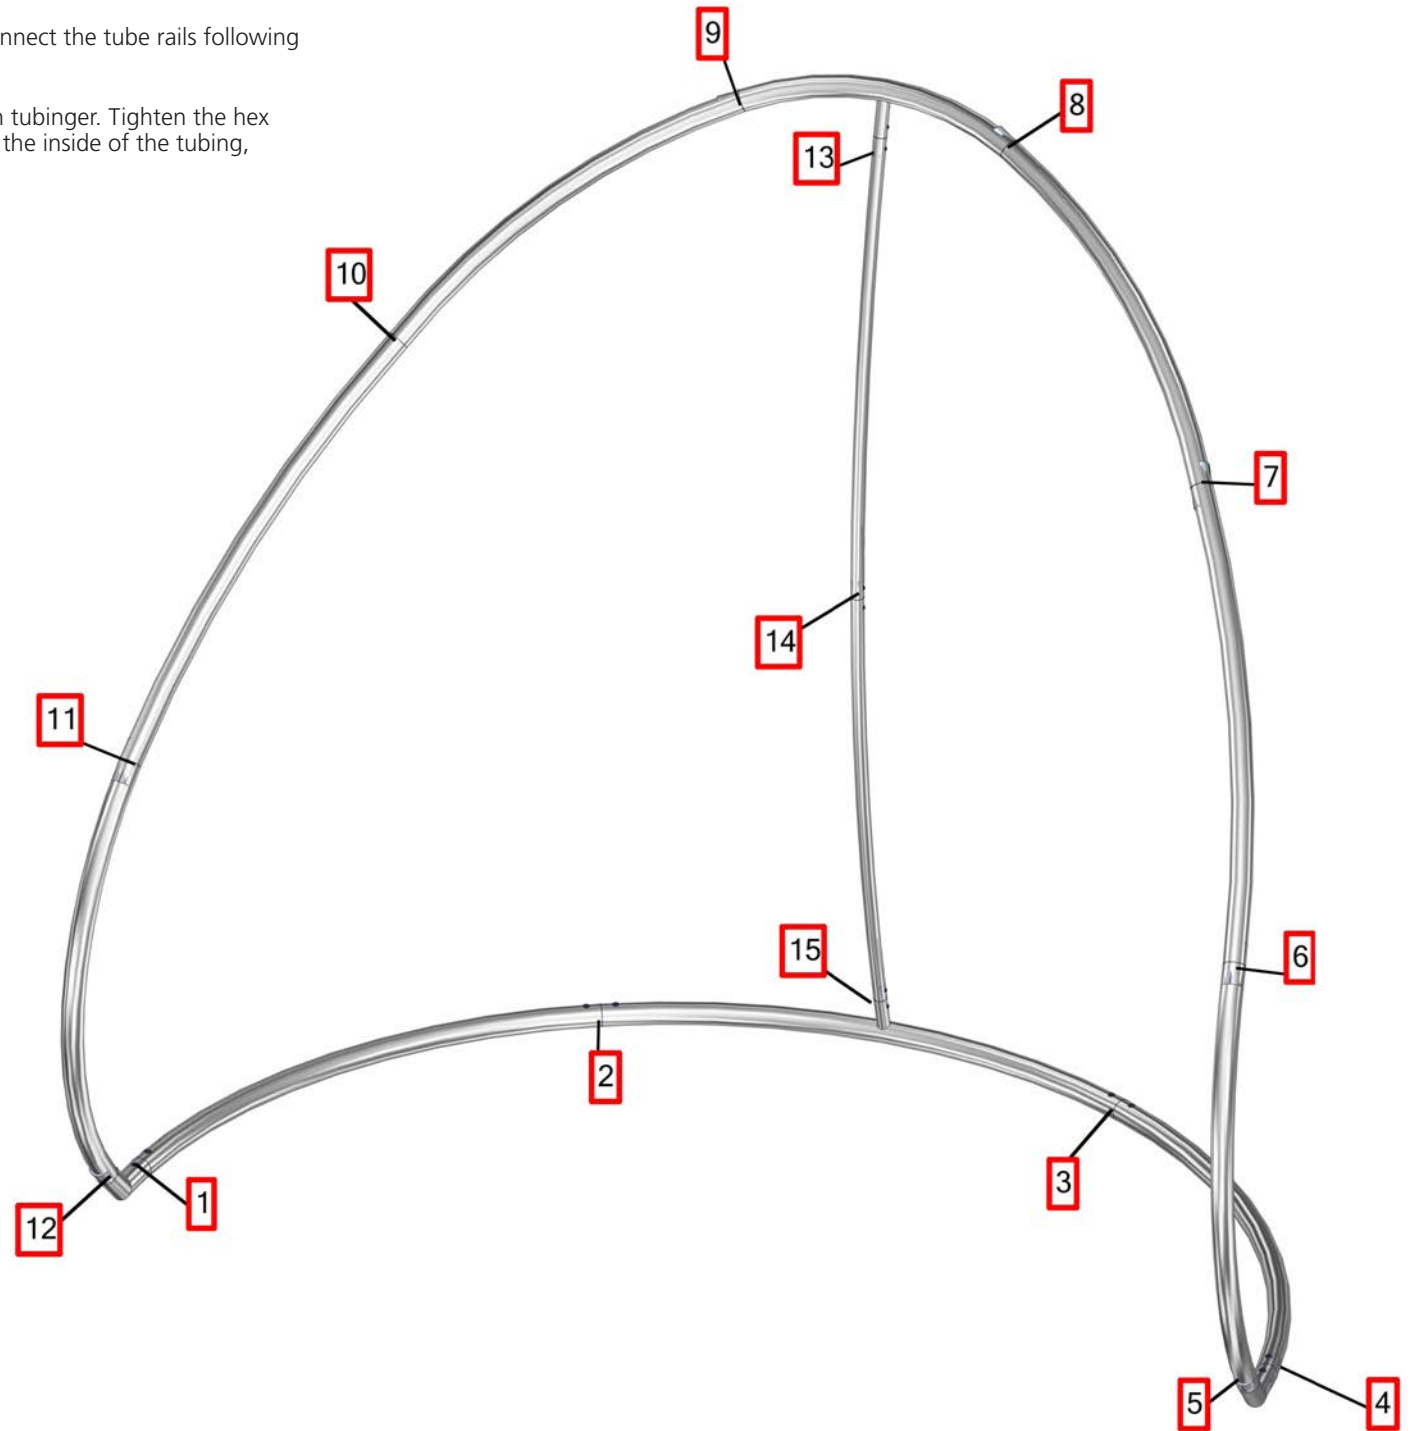

STEP 1: ASSEMBLE FRAME

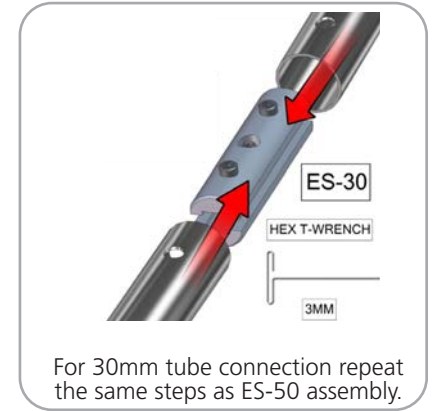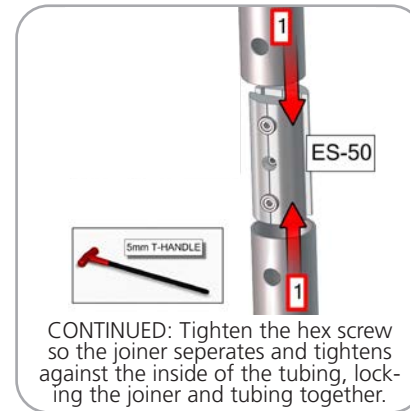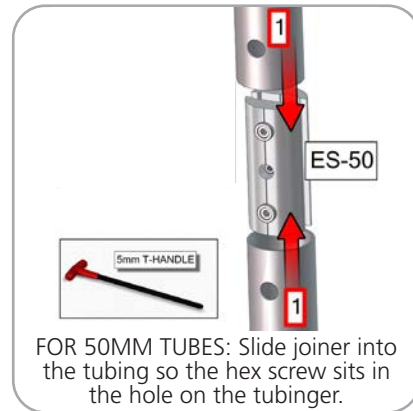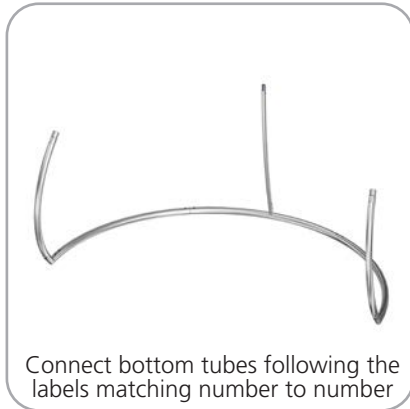

STEP 2: ATTACH GRAPHIC

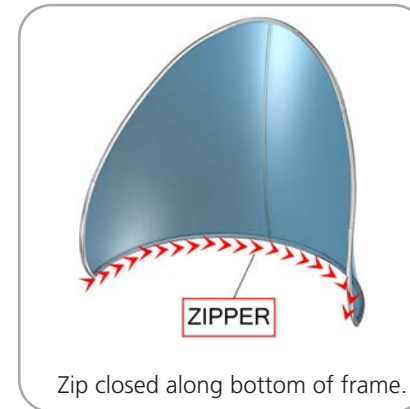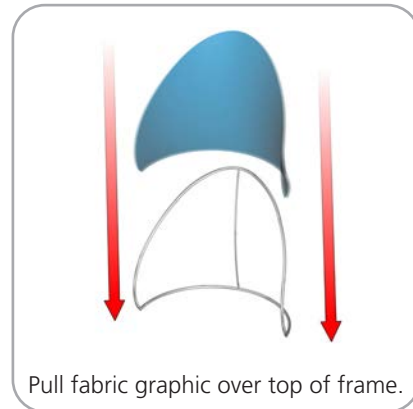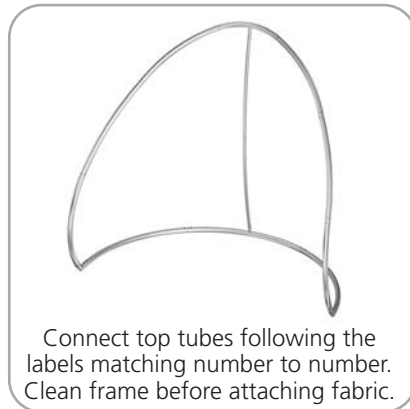

TensionLite Counter - Oval

TensionLite counters couple lightweight hardware with printed stretch silicone edge fabric graphics (SEG) to create funky and functional reception stands. Tables and bases are available in four colored finishes – silver, black, mahogany and natural. Custom sizes also available.



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- Printed stretch silicone edge fabric graphics (SEG) for a custom look
- Counter supports 25 lbs. of weight on center
- Choice of four finishes for table and base
- Kit includes: one frame, two dye-sublimated graphics, table and base, and one wheeled molded OCH2 storage case
- Lifetime hardware warranty against manufacturer defects



dimensions:

Hardware	Graphic
Assembled unit: 47.25”w x 38”h x 23.75”d 1200mm(w) x 970mm(h) x 600mm(d) Approximate kit weight (includes graphic): 53 lbs / 24 kgs	Total visual area: 57.629”w x 35.424”h Refer to related graphic template for more information.
Shipping	
Shipping dimensions: One OCH2 case: 50”l x 30”w x 15”h Approximate shipping weight: (kit and case) 85 lbs / 38.55 kgs	



additional information:

Graphic material: Dye-sublimated fabric Top/Base finishes: <div><div></div>silver</div> <div><div></div>black</div> <div><div></div>mahogany</div> <div><div></div>natural</div>	 www.display-setup-animations.com
--	--



Parts Included		
Part Label	Qty	Part Code
5/16-18 WING NUT	x12	5-16-18 WING NUT
5/16-18 X 1.25" STEEL STUD	x6	5_16_18 X 1.25 STUD
5/16-18 X 2" STEEL STUD	x6	5_16_18 X 2 STUD
2.5" PLASTIC GROMMET	x1	2.5IN-GR-CAP
900MM LENGTH OF TRILOK TRUSS	x2	TRI30-COUNTER
OVAL BASE WITH FC RING	x1	W-05-C-BASE
OVAL FABRIC GRAPHIC	x1	W-05-C-G
OVAL TOP	x1	W-05-C-TOP

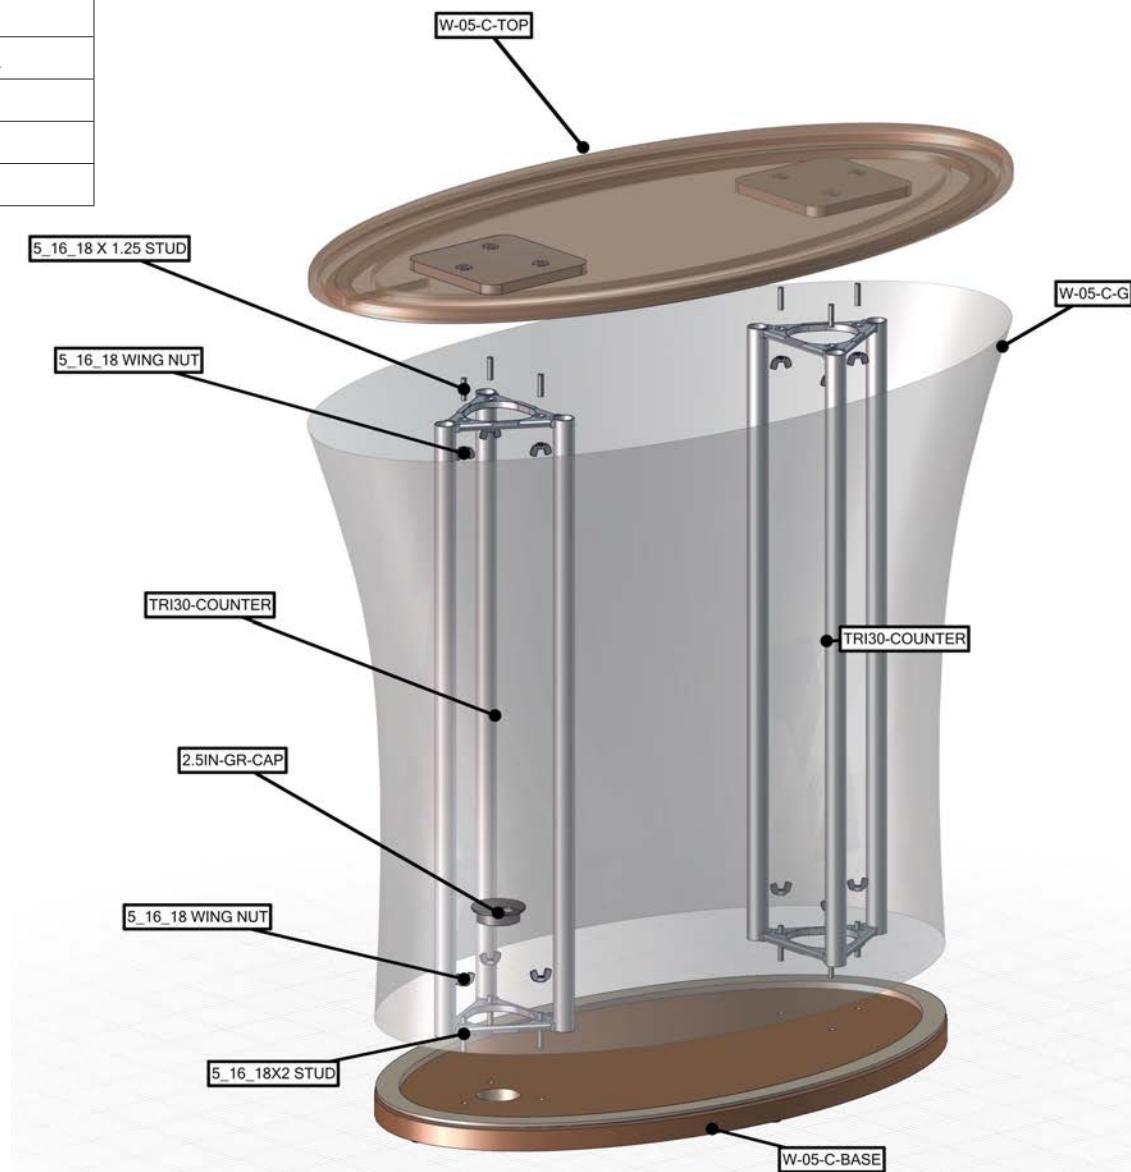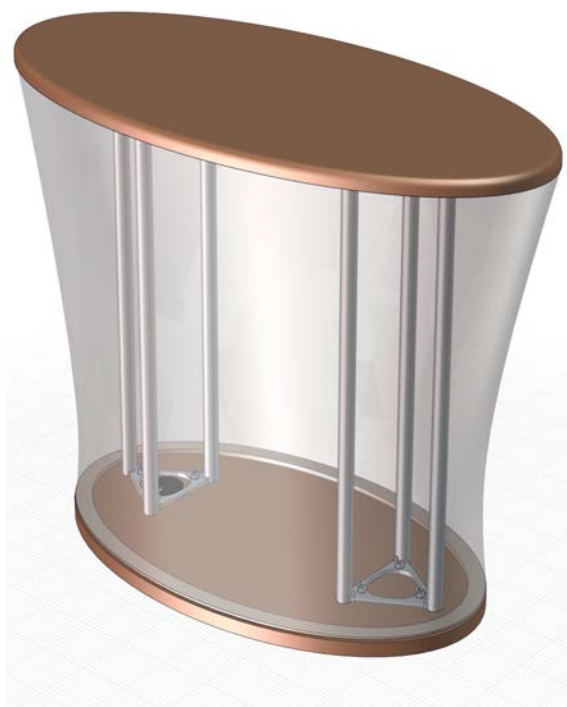



STEP 1: ATTACH BASE

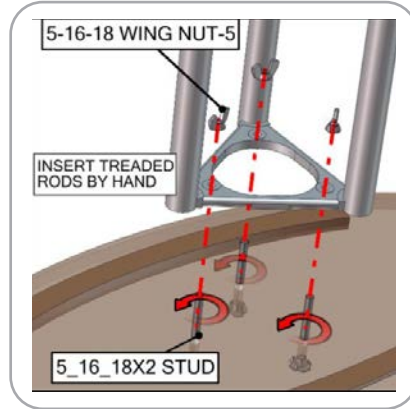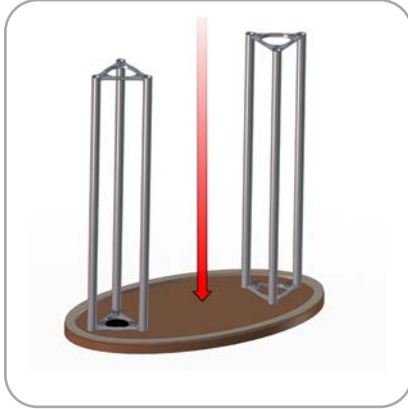



STEP 2: ATTACH GRAPHIC

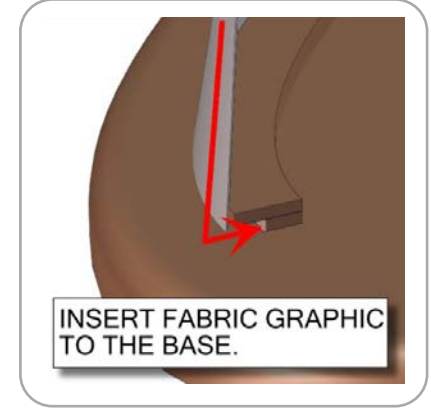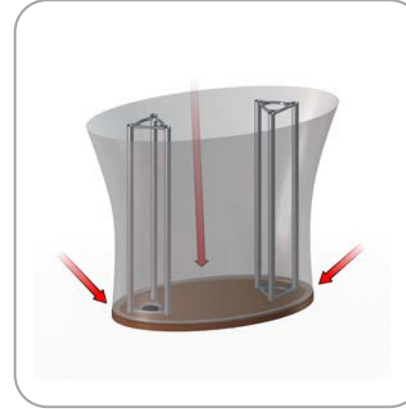


STEP 3: ATTACH TOP

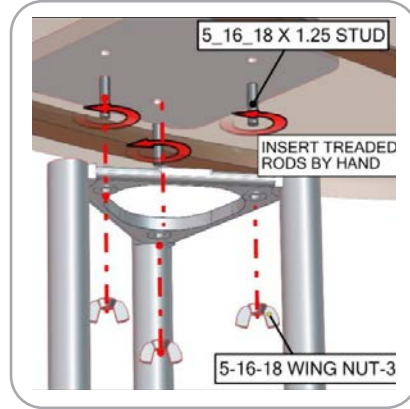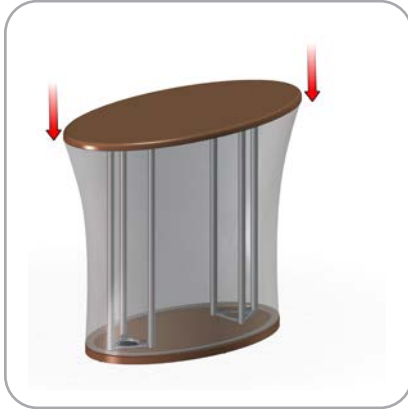

STEP 4: ATTACH GRAPHIC

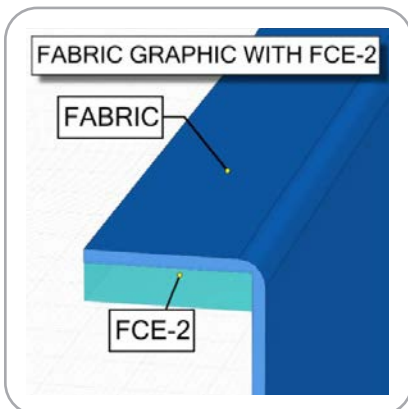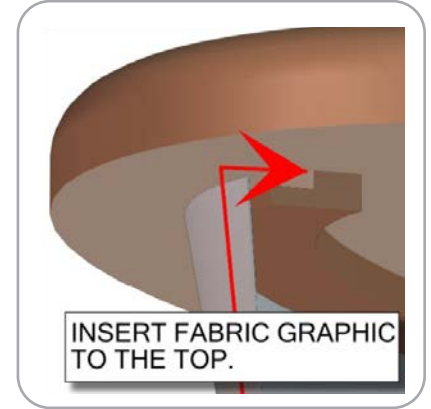

TENSION LITE
CUSTOM FUSION
20 X 20 DESIGN
CFAB-K-06

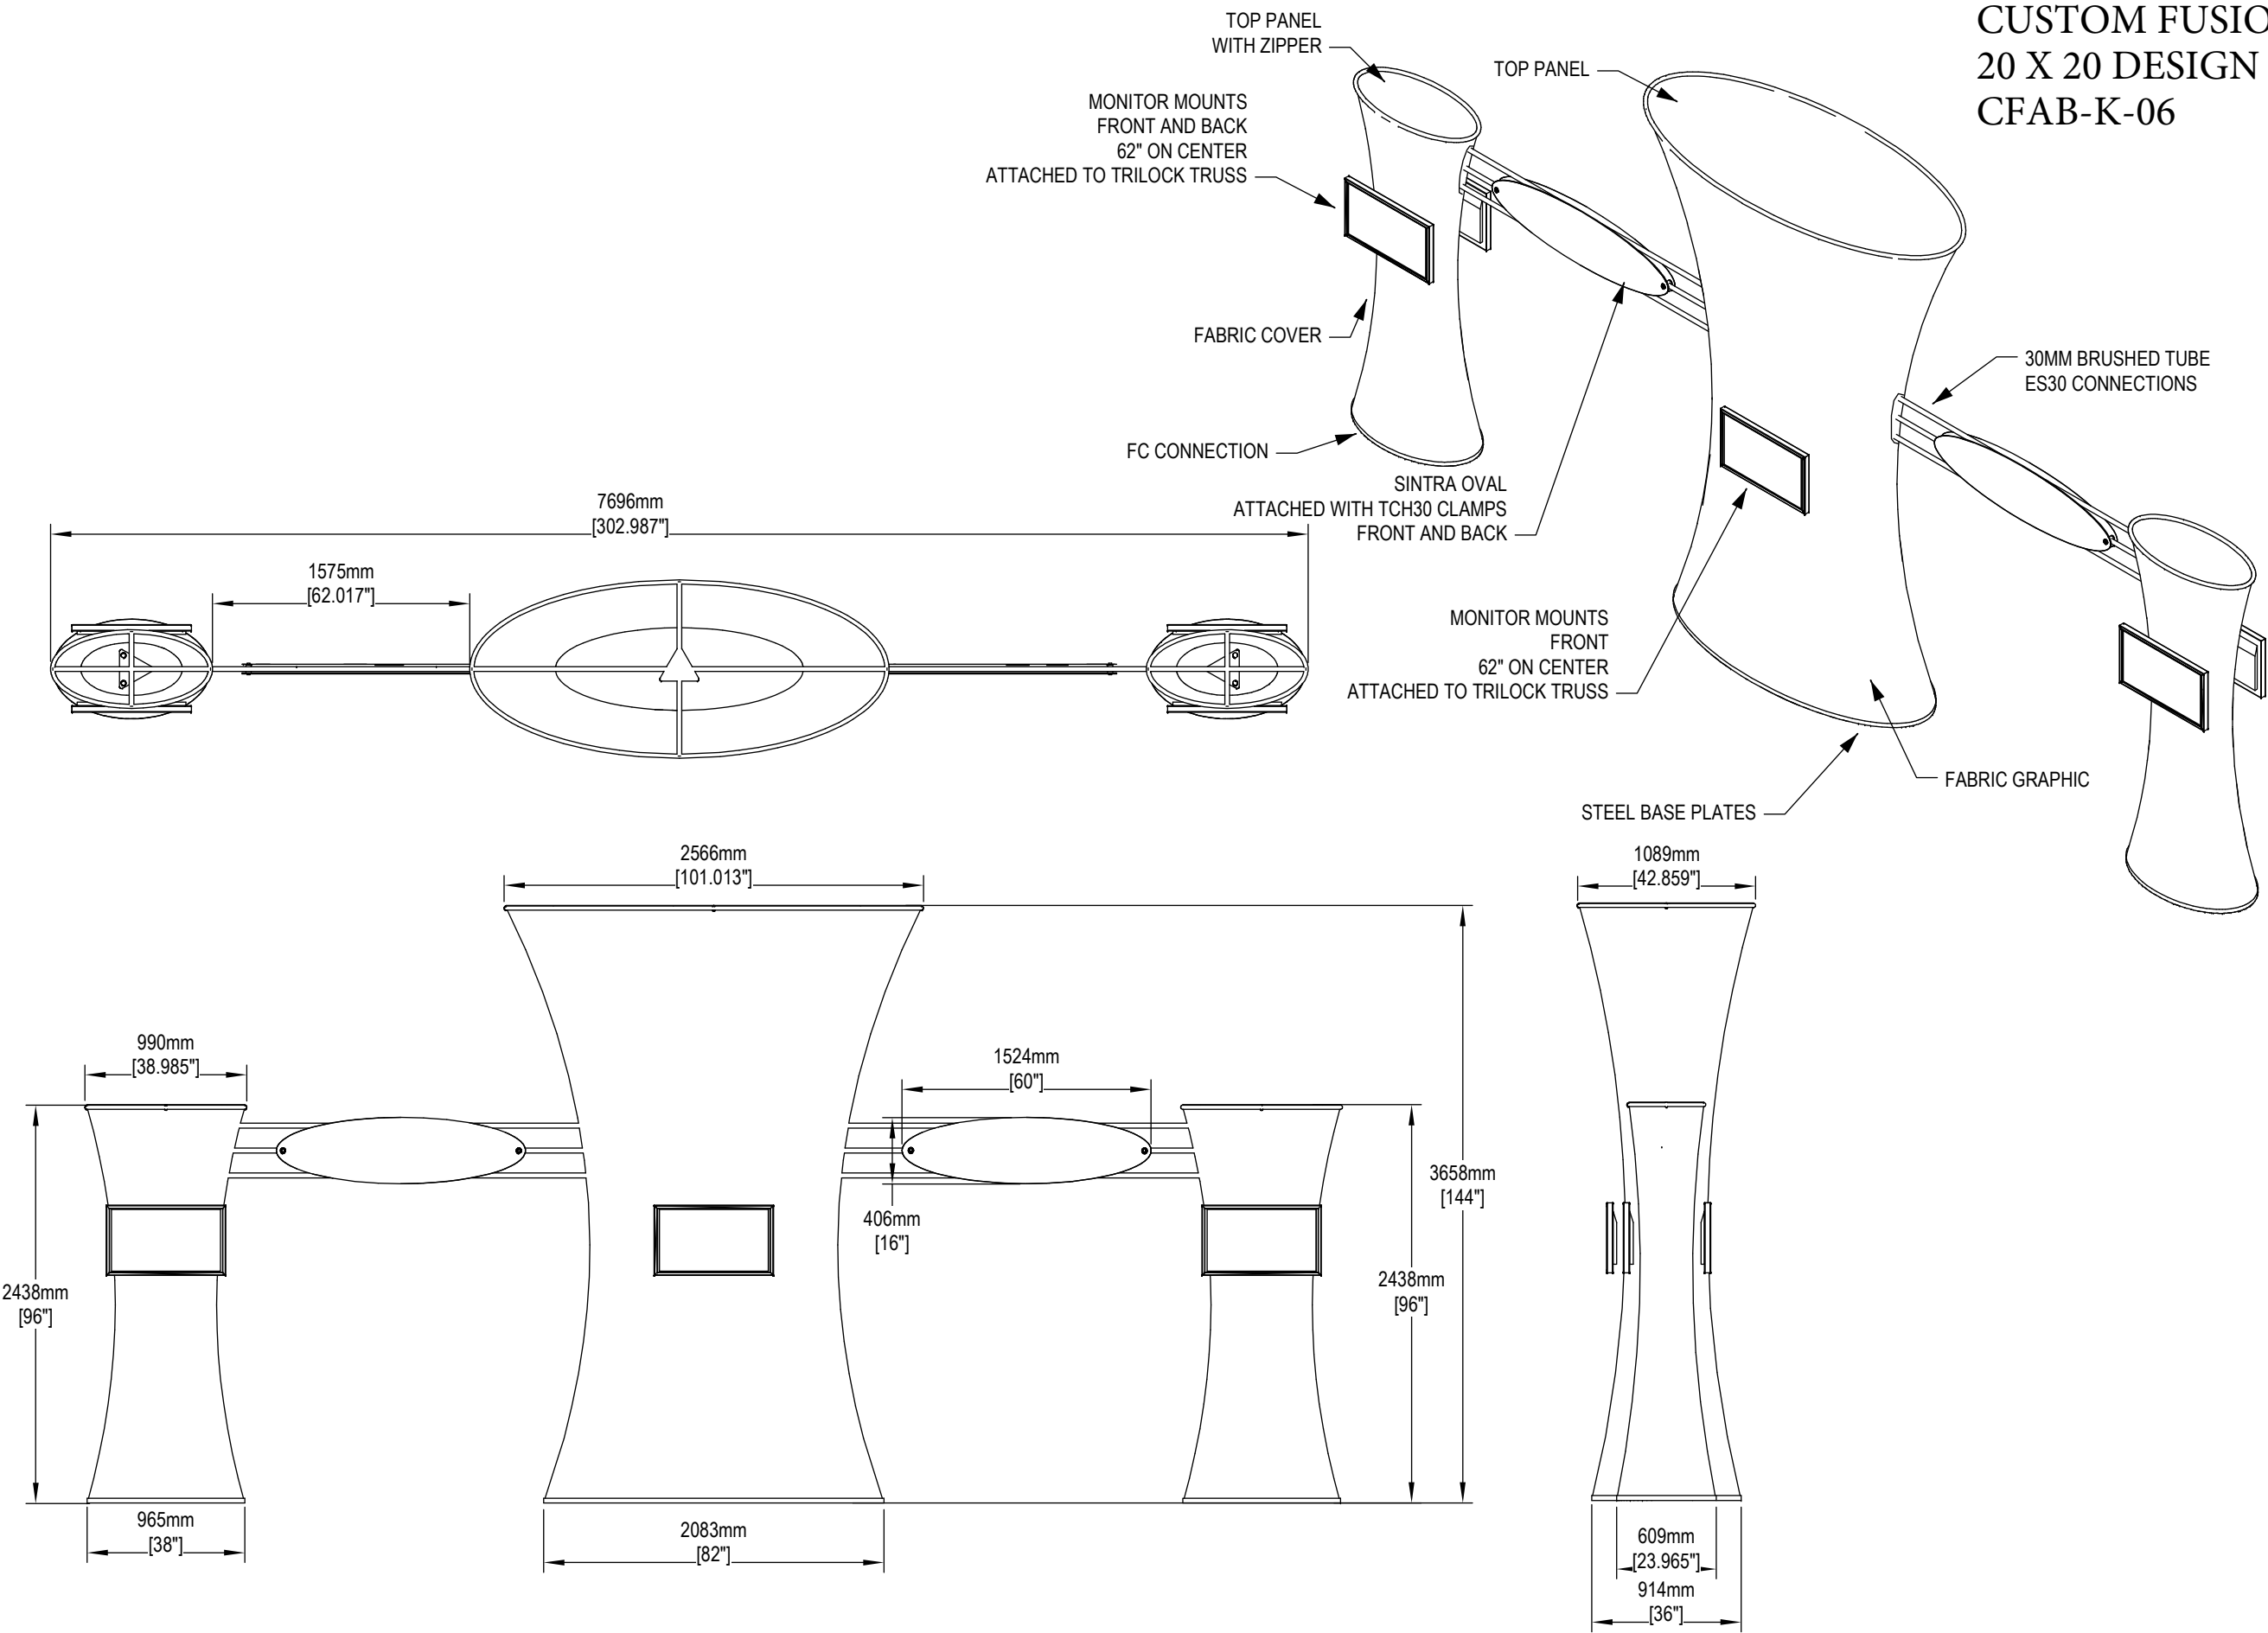

Order #:	
Client	
Dist.	
Dept.	
Man.	
Set up	
Preview	
Ship	
Item	Qty
Packing	
Graphics Size	
Project Manager	
File Name	
Detailer	Date
Description	
MAX. ALLOWABLE TOLERANCES PER 2400mm FABRICATION = ±4mm	
CHECKED BY: _____ DATE: _____	